

Raising the world to a higher level





Product catalogue 2021

Summary



Discover us

06-07 The Buzon® boom 08-09 Mission and values Our commitments 10-11 12-13 Buzon® around the world Achievements 14-17

04-05

62-63

64-81

82-85



The PB Series

18-19 20-21 Laying on a pedestal 22-23 The PB series 24-25 $Composition\, of\, the\, pedestal$ The PB-0-S18 pedestal 26-27 U-PAD GROUND 28-29



PB accessories 30-31 32-33 Levellers and spacer tabs Slope corrector and spirit level 34-35 36 Joist support

37 Booster Protective mattresses 38-39 Terrace finish 40-49 50

51

Fastening wooden pavers Anti-lifting kit



U-BRS system

Joists for pavers Joists for wooden boards 54-59 60-61

52-53

Pricing and packaging

Composition of pedestals and pricing Packaging



Technique and Installation


Standard system and consumption of pedestals 88-89 U-BRS system and consumption of joists 90-91 U-BRS WOOD system 92-93 Laying tips 94-97 Technical service 98-99

86-87



Index 100-101

Buzon[©]

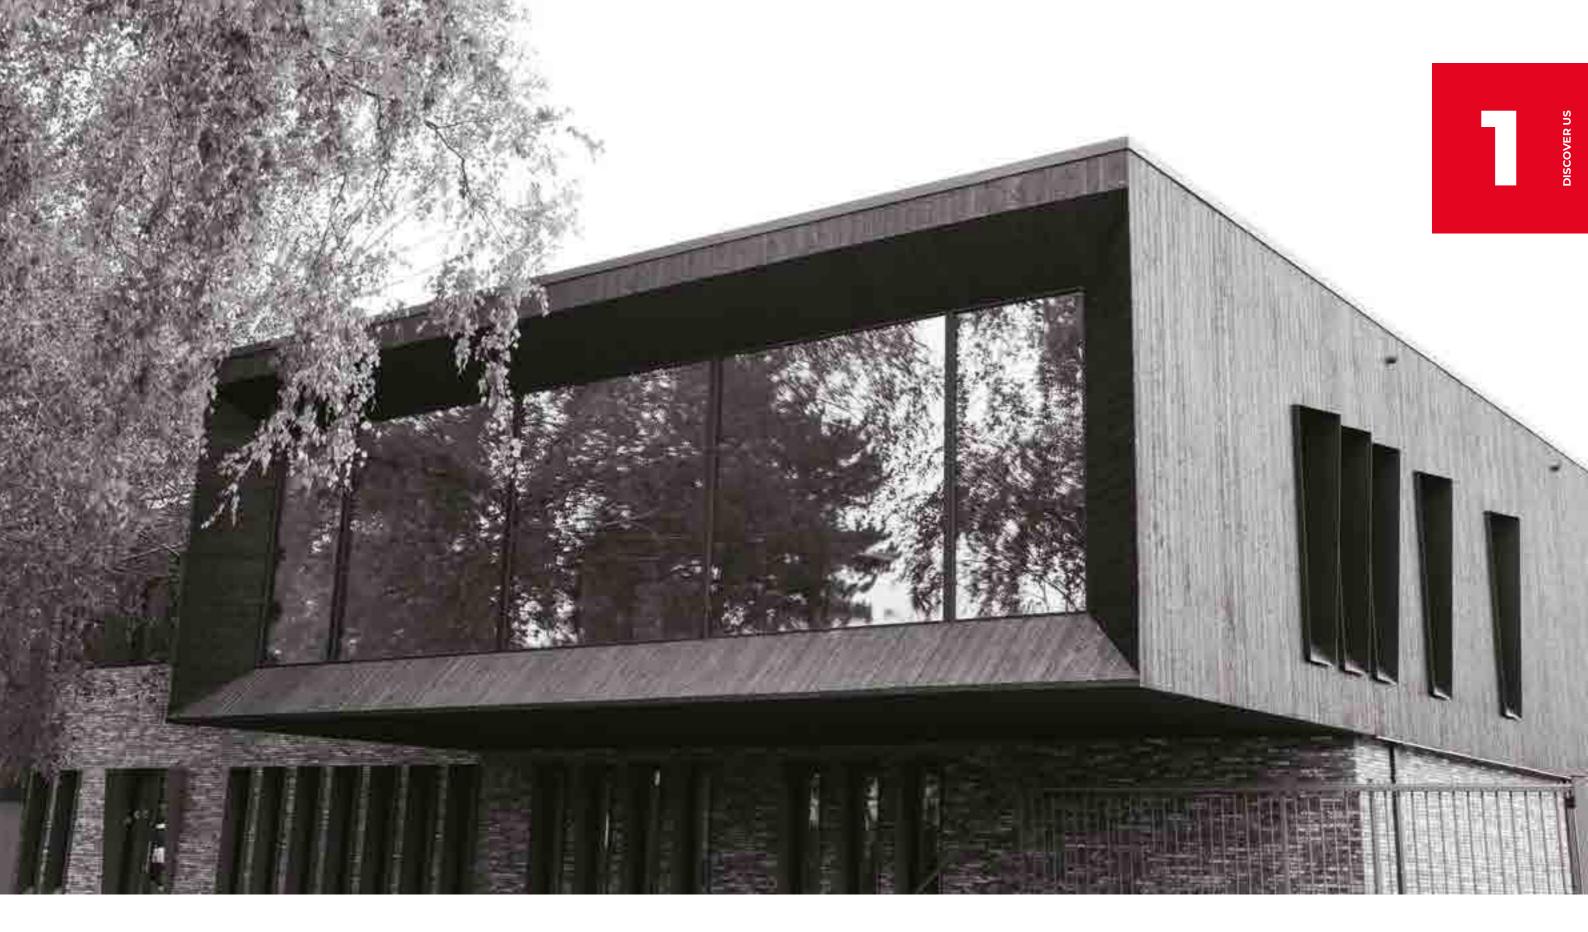



Discover us



1996





Workshop creation from BUZON S.P.R.L (Liège, BELGIQUE)

1987

Laurent Buzon officially joins the company and sets out to conquer new markets.

The pedestals will start to be

The pedestals will start to be installed in the biggest skyscrapers in the whole world thanks to his dynamism.

Buzon® pedestals are installed on the balconies of the PETRONAS TWIN TOWERS in Kuala Lumpur. Installation in the Hauts-Sarts industrial estate (Belgium) and creation of Buzon Pedestal International.

2002



Buzon® supplies more than 100,000 pedestals for a luxury hotel in Singapore, the Marina Bay Sands

2011

Buzon® pedestals are installed at the base of The Shard in London, one of the tallest skyscrapers in Europe.

Buzon® acquires the ISO 9001:2008 certification.

2016



Move to new offices.

Buzon® now has 21 employees.

Establishment of ISO 14001 **2019**

1983

Claude Buzon launches as an independent entrepreneur selling synthetic turf

1992

Creation of the **first adjustable** Buzon® **pedestal**.

<mark>199</mark>7

Creation of the **DPH-series**, the eldest of the family. Silver medal for the innovation prize at Batimat for the slope corrector integrated into the pedestal



2008

Creation of the **BC-series**, the artist of the family.



2010

2009

Creation of the **PB-series**, pedestals that perfectly meet the requirements for laying in a residential environment.

Claude Buzon on a princely mission



2015

Laurent et Claude Buzon on a Princely mission to Singapore.



2017

Buzon® obtains ISO 9001:2015 certification and becomes CO2 neutral. Birth of the Buzon® nursery in Madagascar with more

than 5,000 trees planted.

Buzon® invites its partners from the entire world, its suppliers, its clients and its team to celebrate its 30th anniversary. 2020

Buzon® acquires ISO 14001:2015 certification

Creation of a range of joists and accessories

140,000 Buzon® pedestals were supplied to the Across Ages





More than 30 years ago, Claude Buzon revolutionised the world of terrace support systems by founding Buzon Pedestal International and its innovative pedestals for the embellishment of outdoor spaces.

He started by importing French pedestals and adapted them to the constraints of the work sites. Quickly, he developed his own series of pedestals to respond to the growing needs of the market and exported them around the world.

Since then, the company has grown a lot and is now managed by Claude Buzon's son, Laurent, who does everything to perpetuate the work accomplished. The company has known a beautiful flight, and since then, no less than four generations of pedestals have seen the light of day.

This success rests on solid foundations. Since its establishment in Liège (Belgium), the family business has multiplied its collaborations and now has 25 partners in more than 50 countries. Trust is one of the key values of the company, and this strengthens with each mission, making sure to listen to the client, and leading each project with enthusiasm.

Every year, millions of pedestals are manufactured for projects and large-scale work sites throughout the entire world. Although Buzon® offers stability solutions, the company categorically rejects immobility. Innovation is one of the drivers of Buzon®, which pushes the company to develop ever more adapted and efficient products.





Who are we?

Buzon® is a dynamic team that takes care of accompanying every person who wishes to benefit from great technical expertise in the creation our their indoor living space.

What do we do?

We develop innovative products that are ergonomic and sustainable in the domain of support systems. We do this by surrounding ourselves with passionate, loyal and trustworthy partners and collaborators.

What drives us?



OUR COMPANY VALUES:



TRUST

The Buzon® story is based on the trust given to our partners and our employees, from the autonomy that we give them in each project.



QUALITY

We pay particular attention to the quality of our services, our products, the relationship that we have with each of our clients and suppliers.



ETHICS

For Buzon® ethics represent a great priority. We make sure that everyone is respected and that their opinion is considered. We are also concerned about our commitment to society. That's why we make sure that every project is performed with respect for the environment.



TEAM SPIRIT

Our family business promotes team spirit and solidarity. It is thanks to this collaboration and the constant support of each of our employees that we are always in a position to meet new challenges.

customers"

Our commitments



100% MADE IN EUROPE

All our products are created, designated and manufactured in Europe. Our research and development department is working hard to provide our customers with excellence in terrace support.






QUALITY COMMITMENT

The quality of our products and your satisfaction are our highest priorities. In this regard, Buzon® has been ISO 9001:2008 certified since 2015 and ISO 9001:2015 since 2017. This certification assures you of constant improvement in the quality of our products and services.



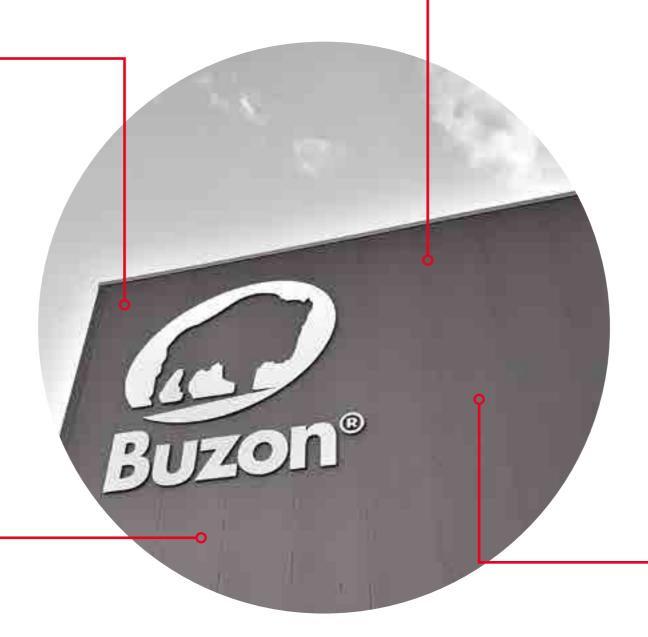



ENVIRONMENTAL COMMITMENT

Concerned about climate change, the company gives particular importance to the environment, in particular by using recycled raw materials and providing 100% recyclable products.

We also want to reduce our greenhouse gas emissions. Indeed, it is no longer $\,$ enough to simply measure and control your energy consumption. Today, it is essential to put a real strategy in place within the heart of our company to reduce our carbon emissions.

In collaboration with the Graine de vie association, we decided to calculate our ecological footprint, reduce it and offset it by planting trees in Madagascar. Today, we are therefore proud to be able to have a CO2-neutral balance sheet.

We obtained ISO 14001: 2015 certification in 2020 to complete our environmental commitments. This certification gives you the assurance that our company operates an environmental management system and that it reasonably manages all environmental aspects related to its activity.









SGBP 2017-814



RECOGNITION

We have won many awards and gained various certifications such as a Gold Medal for innovation at Batimat Paris in 1997, the Golden Bridge in London and even the Good Design Award 2018 with our diverse commitments and company policy.





Our partners around the world

Buzon® wouldn't be the company it is today without its network of distributors around the world. We collaborate daily with more than 40 partners present on all continents. Buzon® thus exports its excellence thanks to its products and the contribution of its distributors to help embellish major projects













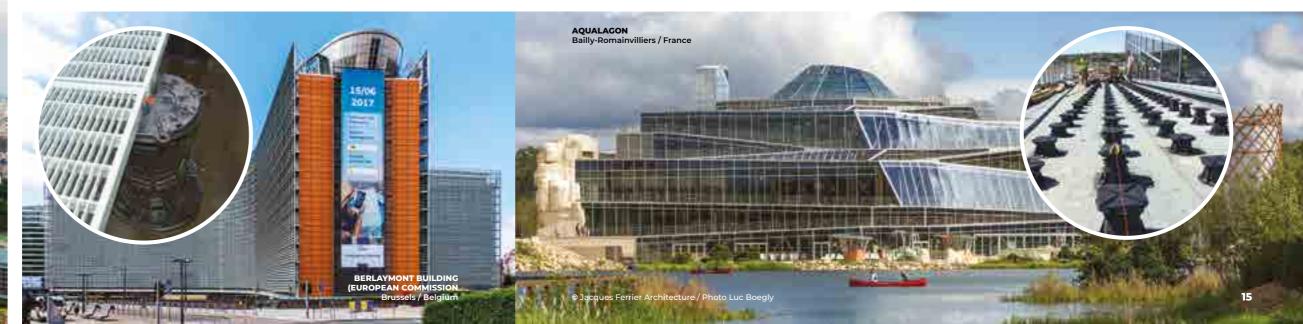



the heights of your creativity"



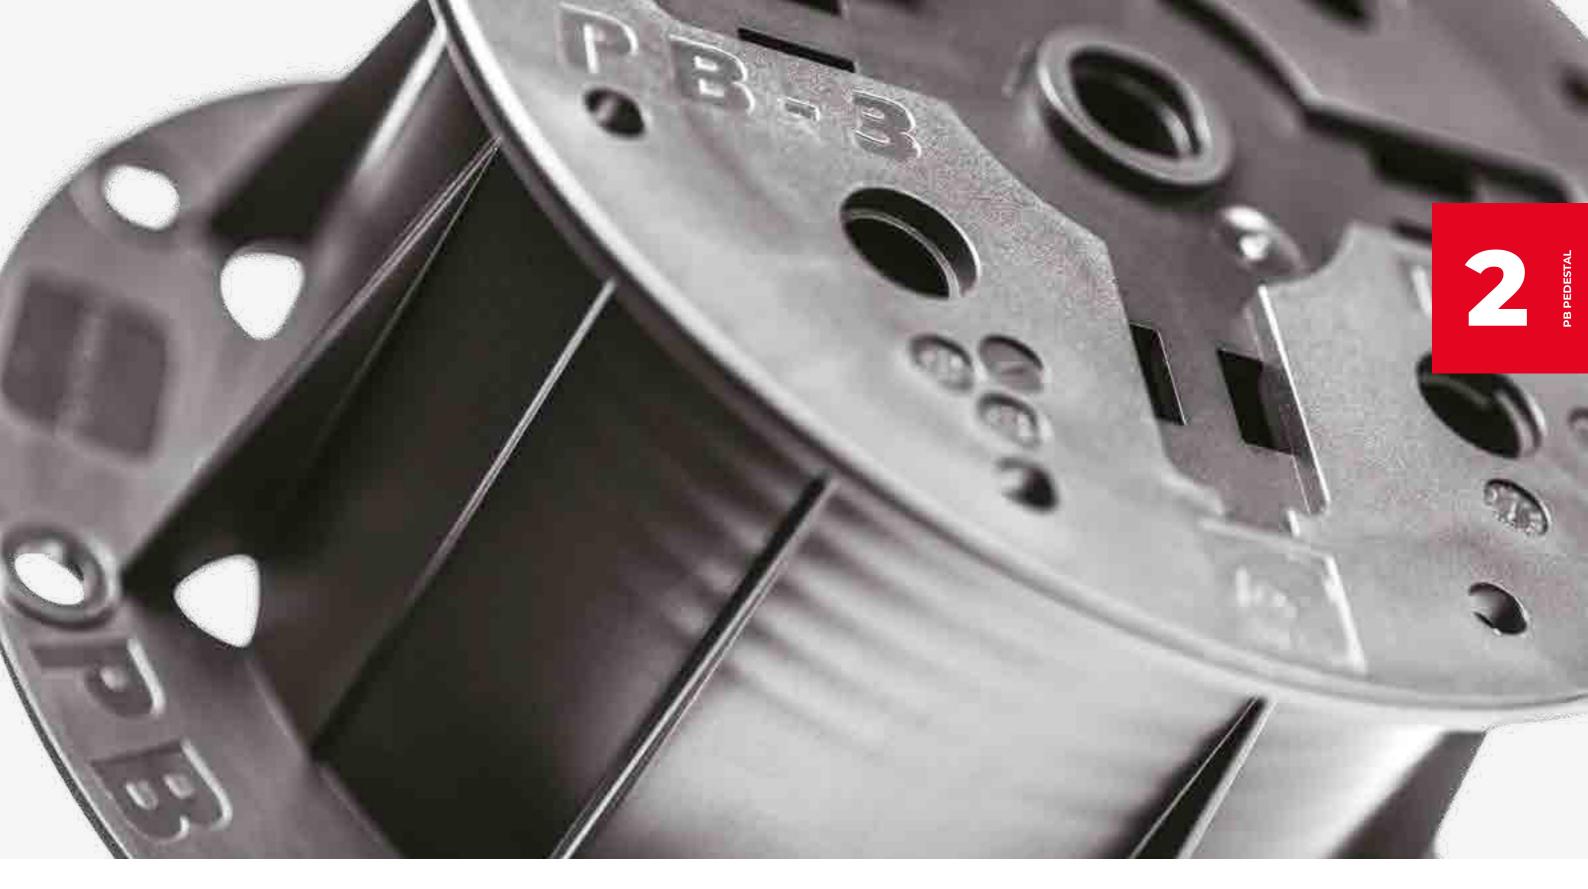





PB-Series

The latest development from Buzon, **PB adjustable pedestals** are perfect for creating residential and commercial spaces. The PB pedestal is easy to adjust from **18 to 955 mm** and allows quick and reliable installation. The enlarged surface of the head of the PB pedestal is specially adapted for the laying of ceramic pavers.

Thanks to its ingenious design, the PB pedestal is easy to adjust and allows for quick and robust installation. The enlarged surface of the top is specially adapted to support terraces made of natural stone, ceramic pavers, concrete floors of wooden boards or composite material.

Laying on pedestals

Creating a terrace in a conventional manner is not always easy. Expansion of the joints, difficulty to evacuate the water, control of the slopes, etc. All these problems strongly compromise the durability of the terrace. It's in this context that laying on pedestals quickly became a requirement, responding to all the constraints encountered on the sites

A veritable precursor in the sector, Buzon® was able to respond to market expectations and develop solutions and products for all types of projects. Residential terraces, flat roof terraces, garden landscaping, fountain terraces, podiums, marquees, technical floors for industrial applications, etc.
Buzon® offers solutions for every implementation.

ADVANTAGES:



Presence of open joints avoiding all risks of cracking as compared to closed joints. Water evacuation made easier



Quick and easy installation




Pedestals adjustable from 18 to 955 mm



High stability thanks to a large top of the pedestal




Easy and precise slope correction up to 5%



A broad series of accessories for the terrace finish



Respect of the waterproofing membrane



Easy access to the waterproofing membrane or substructure




Better thermal and acoustic insulation



Sustainable solution




A system supporting heavy loads



Concealing technical equipment



100% recyclable



"Adjustable pedestals from

3 to 955 mm"













U-PH5



U-PH5



U-PH5





U-PH5



U-PH5







U-PH5



U-PH5



U-PH5







U-PH5

















The PB pedestal can be used with the U-PH5 slope corrector, placed under the base of the pedestal.

U-PH5



With the U-PH5 slope corrector, the additional height is 14 mm.

Composition of the PB pedestal




Top of the pedestal

The top of the pedestal screws directly into the base or in the riser sleeves to meet additional height requirements.

This extra large top has been specially developed for laying thick stoneware tiling. Various accessories are fixed on the top of the pedestal to respond to the problems encountered on the sites.

PB-4-TOP

Diameter of the top 170 mm, surface 227 cm²



Security system

The pedestals of the PB series are equipped with an unscrewing safety system thus preventing each element from detaching at the maximum height reached.

Riser sleeves

The PB riser sleeves are interposed by screws between the base and the top of the pedestal to create the "great heights" pedestals of the PB series.

The riser sleeves enable a maximum height of 955 mm to be achieved.

PB-C1

H: +85 mm to +120 mm

PB-C2

H: + 195 mm to + 235 mm



Lateral reinforcements bolster the stability of the pedestal



8 holes enable the fastening of the pedestal

Base of the pedestal

The base can be simply laid or fixed on any type of compatible medium.

PB-4-BASE

Diameter of the base 197 mm, surface 305 cm²



8 holes at the base of the pedestal ensure complete drainage

The detailed composition of the pedestal is shown on **pp. 65 to 68.**

The PB-0-S18 pedestal

The latest pedestal in our PB series, the **PB-0-S18** is adjustable from 18 to 28 mm. Thanks to its spurs, it easily adjusts in height which allows quick and reliable implementation. The PB-0-S18 pedestal will facilitate the construction of terraces when the reserve height is low.



PB-0-S18 18-28 mm

ACCESSOIRES

Spacer tabs for the PB-0-S18 pedestal



PB-0-S-TABS 2 mm



PB-0-S-TABS 3 mm




PB-0-S-TABS 4.5 mm

Support for wooden joist



DPH-KIT-5





ADVANTAGES

If the adjustment height is known, it is possible to adjust the PB-0-S18 precisely with its spurs before placing it.





U-PAD GROUND, U-TABS-FLAT


HOW TO USE OUR SYSTEM

Buzon® solves and secures the problem of "low heights" under pavers. The combination of the **U-PAD and U-PAD GROUND** accessories and levellers helps to build terraces when the height available under the paver is limited to between 3 and 17 mm. The system provides a flat terrace with good distribution of the laying surface (the pavers are "held" better).






The U-PAD GROUND and the U-TABS FLAT form a product combination but are sold separately.

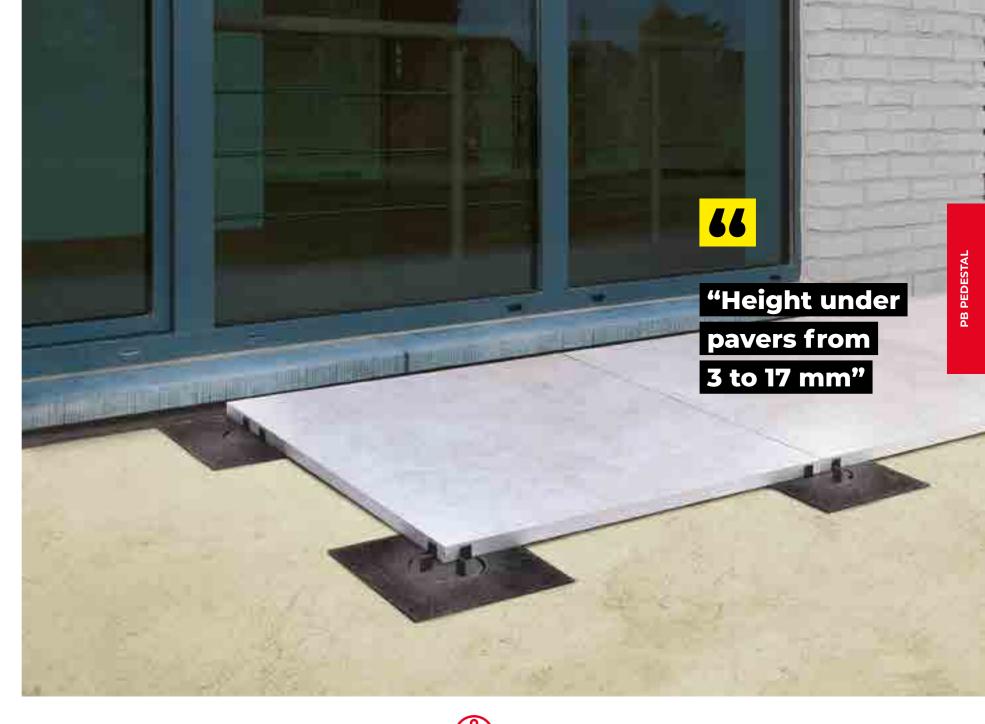



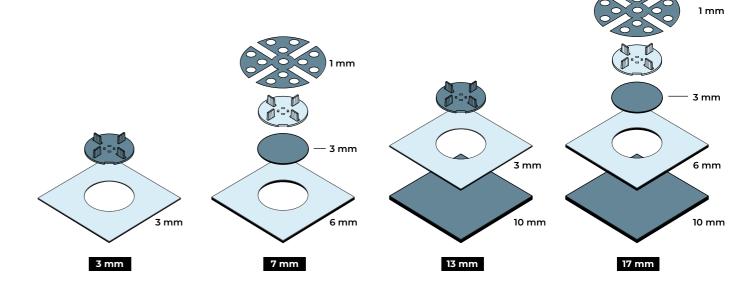

29







PB accessories

A range of accessories complete the PB series pedestals to facilitate the realisation of the terrace. Whatever the configuration of the project, we offer easy and reliable solutions to the various problems encountered on sites.



Spacer tabs



The PB-TABS spacer tabs of 17 mm in height are available in different thicknesses: 2 mm, 3 mm, 4.5 mm, 6 mm, 8 mm and 10 mm. They guarantee a uniform


alignment of the pavers placed on the top of the Buzon®pedestal.



PB-TABS

4.5 mm



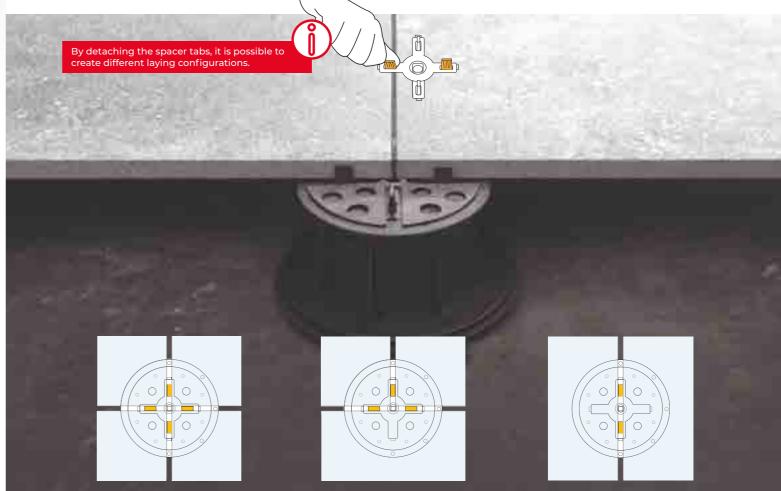




Levellers

The (U-E10 or U-E20) leveller is a 1 or 2 mm wedge in the shape of a clover leaf. It stabilises the pavement, provides additional acoustic comfort and compensates for variations in paver thickness.










U-PH5 0-5%

Slope corrector

In order to manage slopes during the implementation of the terrace, we recommend the use of a **U-PH5 slope corrector**. This adjustable tray is placed under the base of the pedestal and guarantees perfect control of the slopes. It creates a counter-slope of 0 to 5% at intervals of 0.5%, which facilitates the installation of a horizontal or inclined terrace.

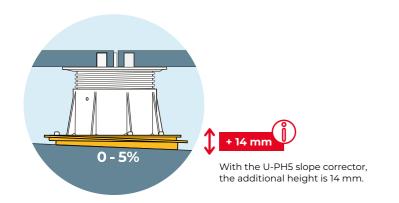


"Master slopes
thanks to our
U-PH5 slope
corrector"




Spirit level

The Buzon® **U-KIT-SL80** spirit level spirit level is the essential tool for mastering slopes. It measures the value and direction of the slope of the terrace support at any location. This information is essential for the use of our slope correction systems.

CHARACTERISTICS



Locking key: The locking key at the centre of the slope corrector is used to lock the corrector at the desired value.

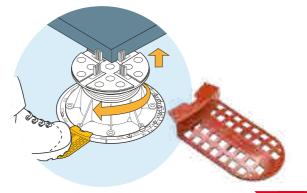

Key foot: enables the orientation of the corrector to be maintained when adjusting the height of the pedestal.


KEY FOOT


2 Orientate the spirit level to align the bubble with the arrow.

To determine the value and direction of the

The bubble indicates the value of the slope in %. The alignment of the numbers indicates the direction of the slope to be straightened. Draw the arrow and the number on the ground. Example 3%.


Prolonged exposure of the spirit level placed on the ground at a temperature above 25°C makes the bubble disappear. Put the spirit level in the shade!

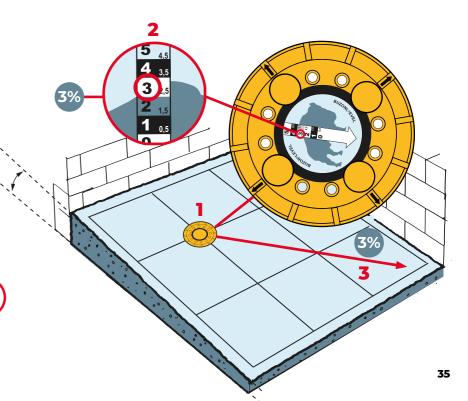


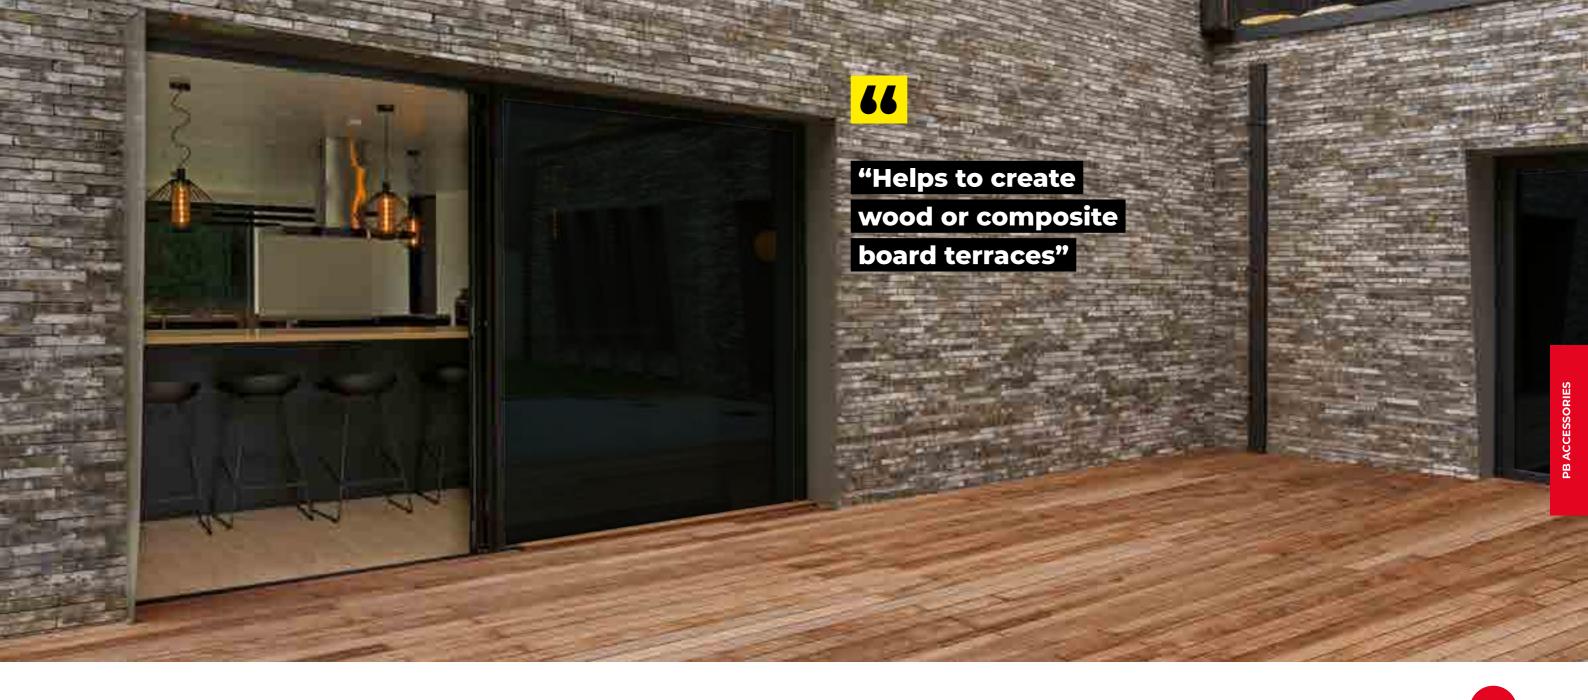

Joist support

The PB-KIT-5 joist support kit attaches to the top of the Buzon® pedestals with our plug-in system from the PB series. It firmly holds up the joists supporting the terrace boards.







PB-KIT-5

Riser


Thanks to the U-SHIM 5 mm riser, the total height of the pedestal can be increased by 5 mm (with the possibility to stack up to 4 elements), which is ideal for making small height adjustments on site.



U-SHIM 5 mm



U-SHIM is also compatible with our U-PH5 slope corrector.

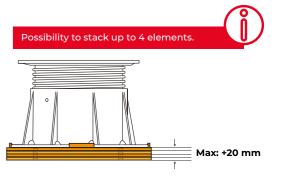


U-PAD protection mattress

200 x 200 mm




The U-PAD protection mattress is made of recycled rubber. It is placed under the pedestal and provides additional acoustic comfort. It also helps protect the support if it is subject to puncturing.

Buzon® pedestals are designed to be fitted to most waterproofing membranes or



200 x 100 mm

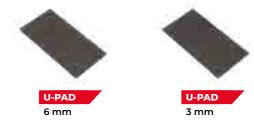


If needed, the U-PAD mattresses can be used as risers and to fill in differences in levels (e.g. different levels of waterproofing membranes).








The U-PAD protection mattresses are also available in a format (90 x 60 mm) adapted for use under wooden joists. They provide better acoustic comfort and can be stacked




All our U-Pad mattresses are non-perishable.



BSW Regupol® Sound insulation up to 23 dB



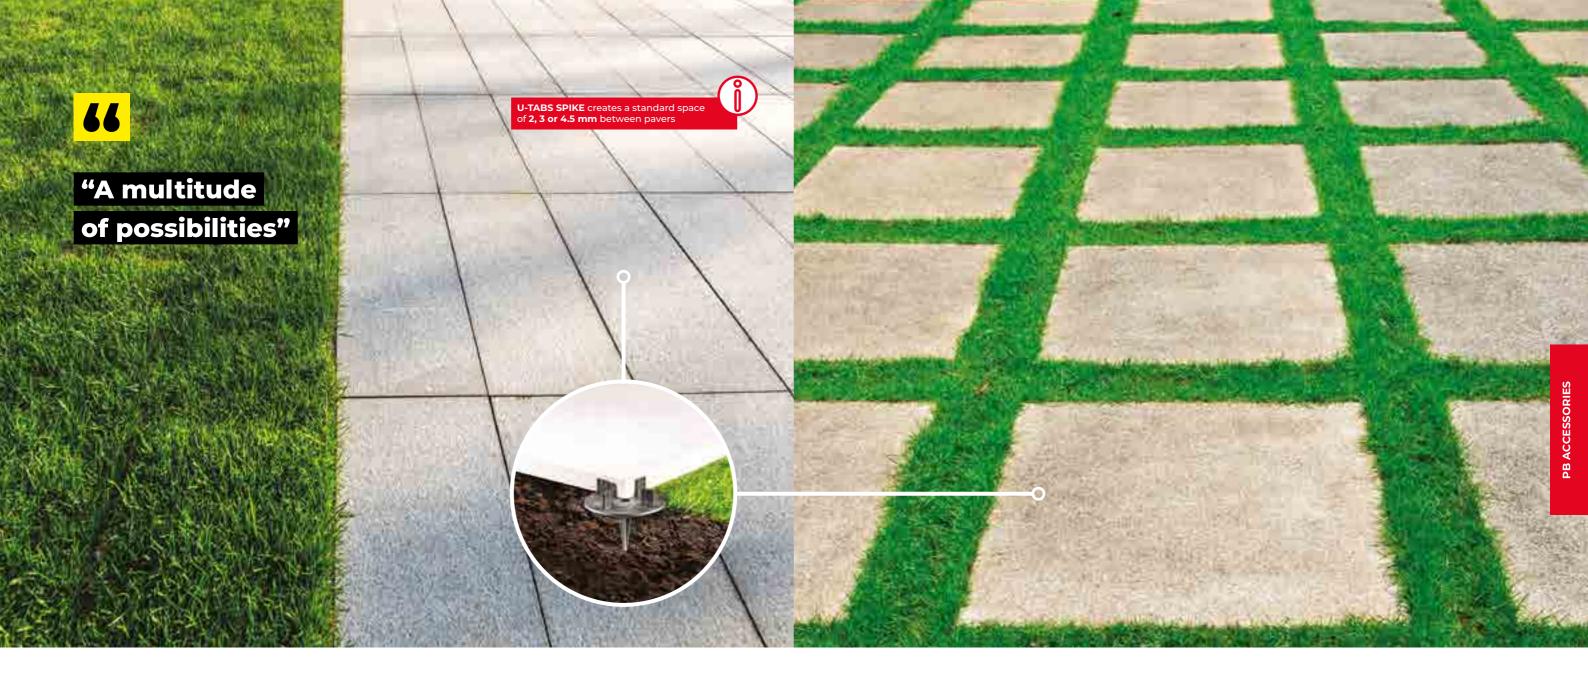


U-TABS SPIKE


The **U-TABS SPIKE** spacer tab enables the direct laying of pavers on soft ground, gravel, lawns, etc. It is planted directly in the ground and facilitates the creation of terraces or Japanese steps.









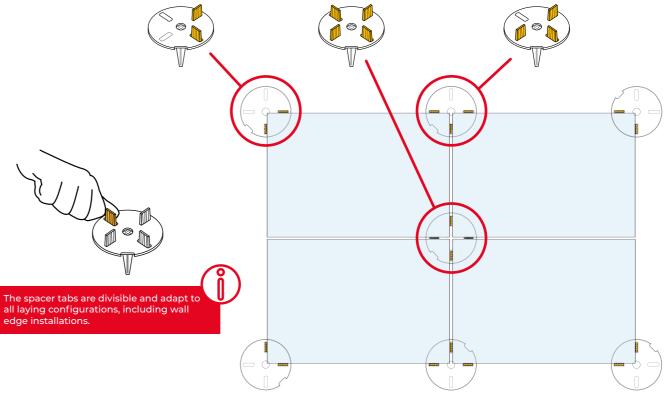




"Terrace perimeter" fastening

The **PB-END** finishing kit supports the peripheral pavers for cladding the edge of the space created under the terrace installed on PB pedestals. Two hooks on the top and base of the pedestal hold vertical 20 mm thick paver cuttings to ensure a solid and homogeneous finish.









ANGLE









On its constant quest to come up with ever more comprehensive solutions, Buzon has developed a multifunctional finishing accessory, U-TILES. It allows you to lay small finishing patio tiles, either against a wall or side by side.

In addition, U-Tiles makes it possible to incorporate smaller tiles into the patio design, allowing creative freedom for a beautiful finish.



- **U-TILES:** plate fastened on the head of
- **PB-KIT-8:** universal fastener
- **U-TABS:** spacers to be placed on the plate
- U-END-LOCK: fastener
- **U-END-BASE:** edging base
- 6 U-E20-EDGE: leveller that gives the paver
- U-BRS-VIS




U-TILES can be used from **PB-1** pedestals measuring **min. 50 mm**



WALL PERIMETER AND CORNER FINISHES


The **U-TILES** system is a support that allows the use of small cuts of paving along the wall perimeters and in corners. It also makes it possible to place and/or glue small pieces of paving all over the terrace (not just at the edge).


U-TILES makes it easier to lay cuts of paving of various shapes and/or sizes.

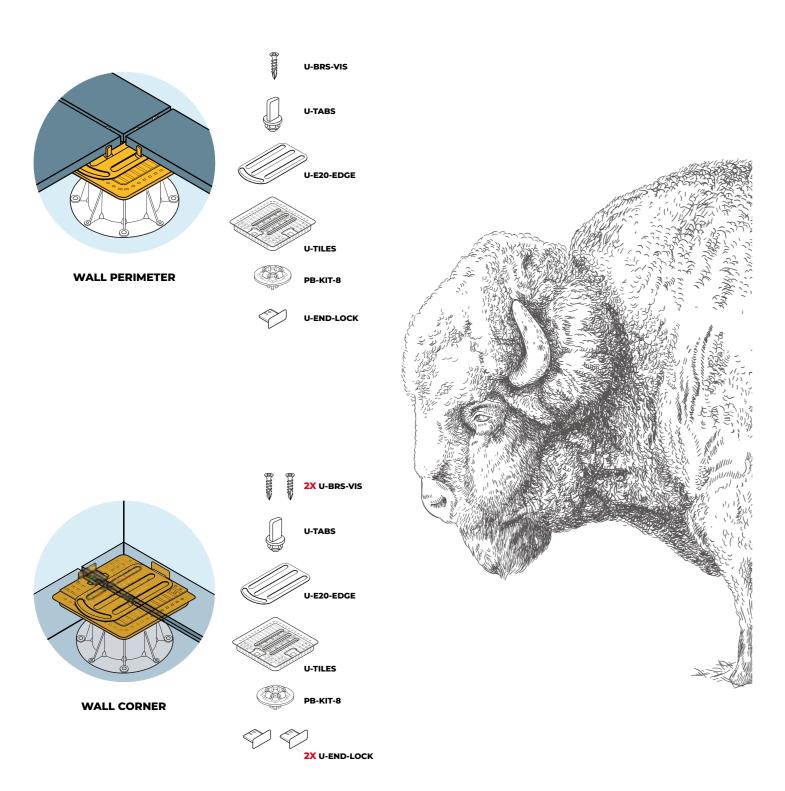

PLINTH FINISHING


U-TILES also allows plinths to be laid (between 20 and 30 mm thick) at the terrace perimeter and corner.

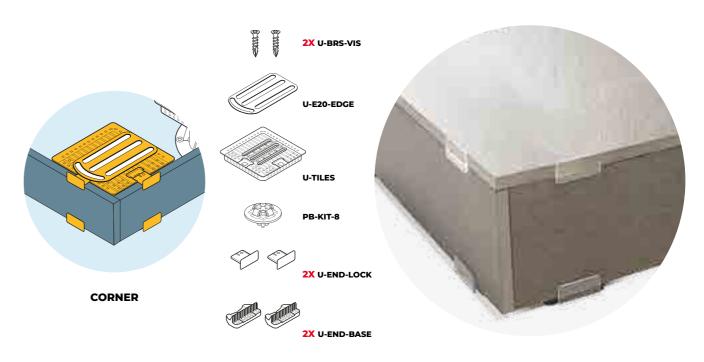


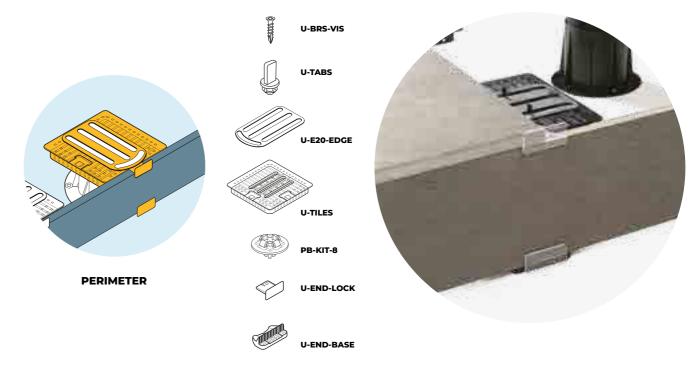

INVISIBLE FINISH

Thanks to **U-TILES**, it will be possible to choose the plinth fastening method: with or without glue for an invisible finish.

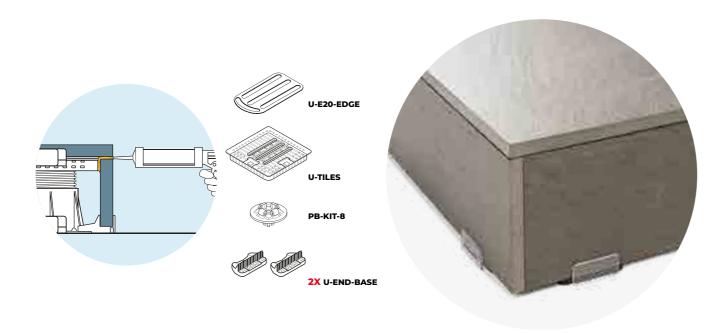

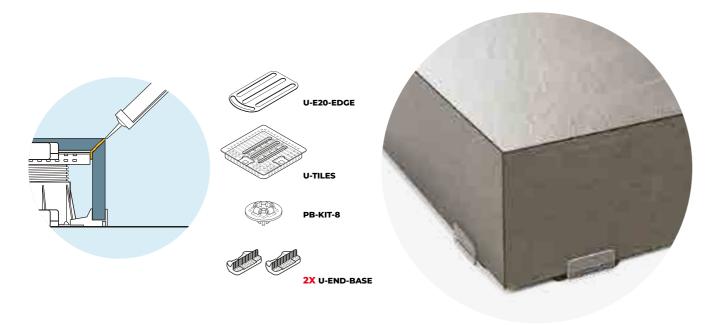

Perimeter Spacer

U-WALL creates a uniform 5 mm gap between the pavers and the wall, enabling water flow which protects the terrace in the case of heavy rainfall, snow etc. It is placed on the top of the PB pedestal.



Patented

CHARACTERISTICS





curved etc. which makes installation easier and more efficient.

With its flexible tile retainers, the U-WALL can be installed on terraces of any shape: angular,

The spacer tabs can be detached to adapt to all types of layout.

The U-WALL can be fixed to the pedestals with screws to keep the pavers in place. It is also adjustable on the top of the pedestal to create an optimal gap.



Paving support at the perimeter of the terrace

The **U-EDGE** is an adaptable support that attaches to the PB series pedestals. Due to its design, it creates a quick and easy solution to complete the implementation at the edge of a terrace. It can be used with any type of layout and all shapes of paving.




Patented


CHARACTERISTICS



The U-Edge enables the creation of a space between the pavers and the wall keeping an even gap and enabling water flow which protects the terrace in the case of heavy rainfall, snow etc.




With its flexible spacer tabs, the U-Edge can be installed on terraces of any shape: angular, curved etc. which makes installation easier and more efficient.




The spacer tabs can be detached to adapt to all types of layout.

HOW TO USE THE U-EDGE SUPPORT





U-EDGE is a support enabling the usage of small paver cuttings (from 2 to 14 cm wide) at the edge of the wall. These small pavers are placed on the support which can be screwed on to the pedestal or fixed using the **PB-KIT 8.**










The **U-TABS** spacer tabs 2, 3 and 4.5 mm thick are used with the U-EDGE. By fixing these in the required location, they create a gap between the paving keeping the smaller cuts evenly spaced and holds them securely in place.




Fastening for wooden pavers

The **PB-FASTENER** makes it possible to fix wooden pavers and provides more stability in the event of high winds.

CHARACTERISTICS



The PB-Fastener is screwed in to the top of the pedestal. It adapts perfectly to all types of grooved wooden pavers.



Once placed, it is invisible

Anti-lifting kit

The **U-WASHER** kit installs easily on all paver terraces and prevents them from lifting in case of strong gusts of wind.



35 mm Inox (316)



U-WASHE 50 mm Inox (316)

U-Washer is available in 35 and 50 mm thicknesses



Warm Grey (RAL 1019)



Light ivory (RAL 1015)



ron Grey (RAL 7011




Window Grey (RAL 7040)



Signal Black (RAL 9004)




Polycarbonate







U-WASHER



PB-TABS 4.5 mm




PB-KIT-1

U-Washe vis (scr

U-Washer can be fixed with U-Washervis (screws), PB TABS 4.5 mm and PB-KIT-1.



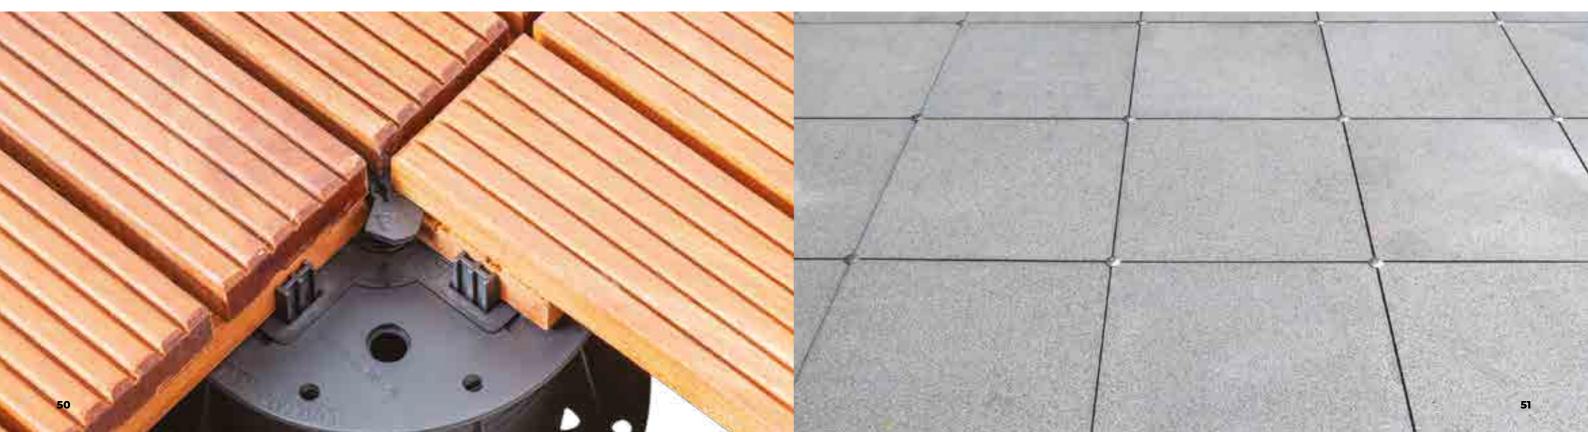





U-BRS System

Buzon Rail System (BRS) revolutionises the realisation of raised terraces

The new **U-BRS** laying system for outdoor raised floors ensures simple and easy installation. Used as a support system, it guarantees great stability and facilitates the arrangement of outdoor spaces.


Why choose the U-BRS System?

The **U-BRS** system and its aluminium joists facilitate the laying of 20 mm ceramic pavers of all sizes. With a thickness of 24 or 38 mm, the joists guarantee a superior resistance to the applied loads and only require a gap of 80 cm (maximum) between each supporting pedestal for the 38 mm joists and a spacing of 60 cm (maximum) for 24 mm joists.


SEVERAL ADVANTAGES




Time savings




Simplified laying of pedestals




Aids drainage of rainwater



High stability of pathway surfaces



Stability of overhangs



Possibility of laying irregular sizes of pavers/boards (e.g. large format 120 x 120 cm or small width 20 x 120, 30 x 120 cm)







n


NEW

U-BRS System


The joists are available with anodising (U-BRS-B) and without anodising (U-BRS-M)

Practical and functional, the **U-BRS** system offers a complete structure for the elevated laying of outdoor space.

The system includes height-adjustable polypropylene pedestals, reinforced aluminium profiles and spacer tabs that provide a gap of 3 mm between the pavers. The system is complemented by finishing accessories capable of meeting all types of implementation requirements.

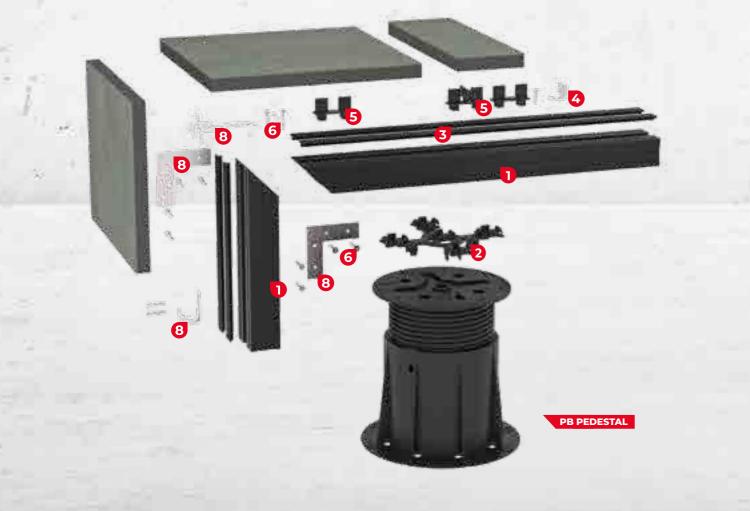



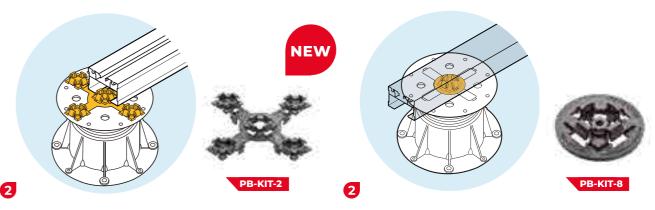


PB-KIT-2: Joist support


It secures the joist to the top of pedestal simply by pressing. Once the PB-KIT2 is installed on the pedestal, simply press the joist on the pedestal, and the profiled base of the joist automatically attaches, while allowing the pedestal to slide under the joists for optimal positioning.

PB-KIT-8: Joist support

It is also possible to use our PB-KIT 8 universal fastening.

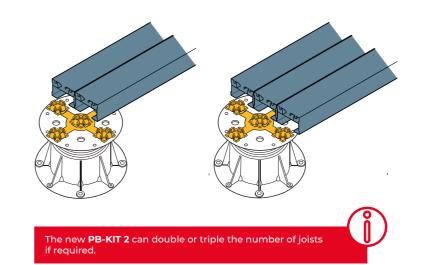



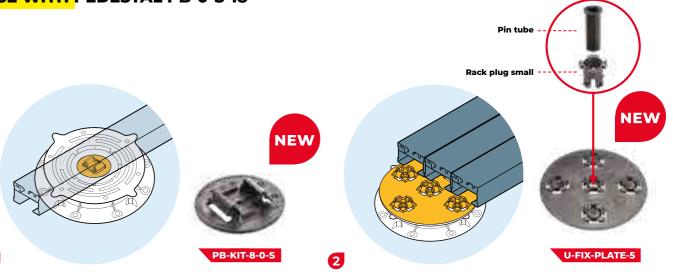


PB-KIT-8-0-S: Joist support
The PB-KIT-8-0-S kit is used for fastening ele


The PB-KIT-8-0-S kit is used for fastening elements to the PB-0-S18 pedestal.

U-FIX-PLATE-5: Joist support If joists are juxtaposed or crossed, using a U-FIX PLATE-5 is necessary.


It is fixed to the head of the pedestal using a pin tube and small rack plug.

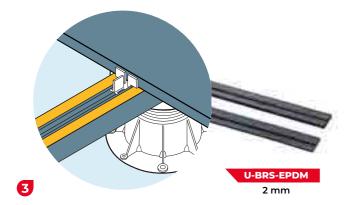


U-BRS-EPDM-2 mm: EPDM protection Attached to the U-BRS joists, it stabilises the paver and provides additional acoustic comfort.

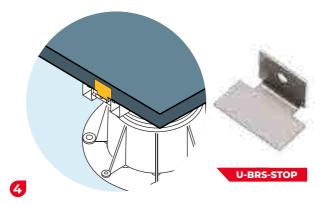


U-BRS-STOP prevents the pavers from slipping off the end of the terrace. It enables stopping the pavers at the edge of the terrace.

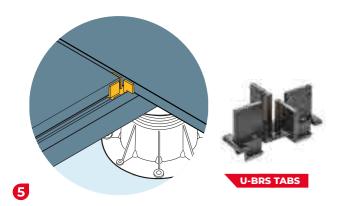


U-BRS-TABS: spacer tab that regulates the spacing between the pavers, ensures alignment, and allows the rapid drainage of excess water. The spacer tabs are available in different thicknesses: 2, 3 and 4.5 mm.

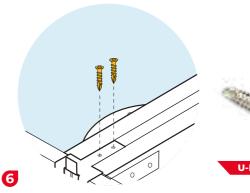


U-BRS-VIS: Fastening screws for joists (3.9 x 25 mm) U-BRS-VIS also enables U-Wall and U-Edge accessories to be fastened to the heads of pedestals

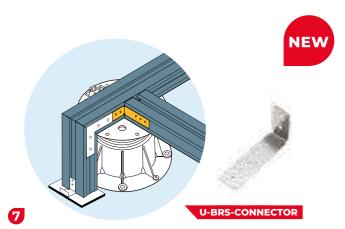

U-BRS-CONNECTOR: connector for securing two perpendicular joists.

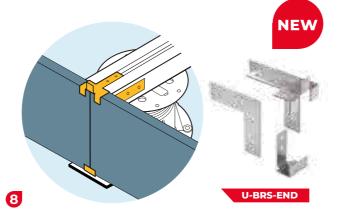

U-BRS-END: stainless steel finishing kit to facilitate peripheral terrace cladding. Two blades with claws encircle the 20 mm plinth.

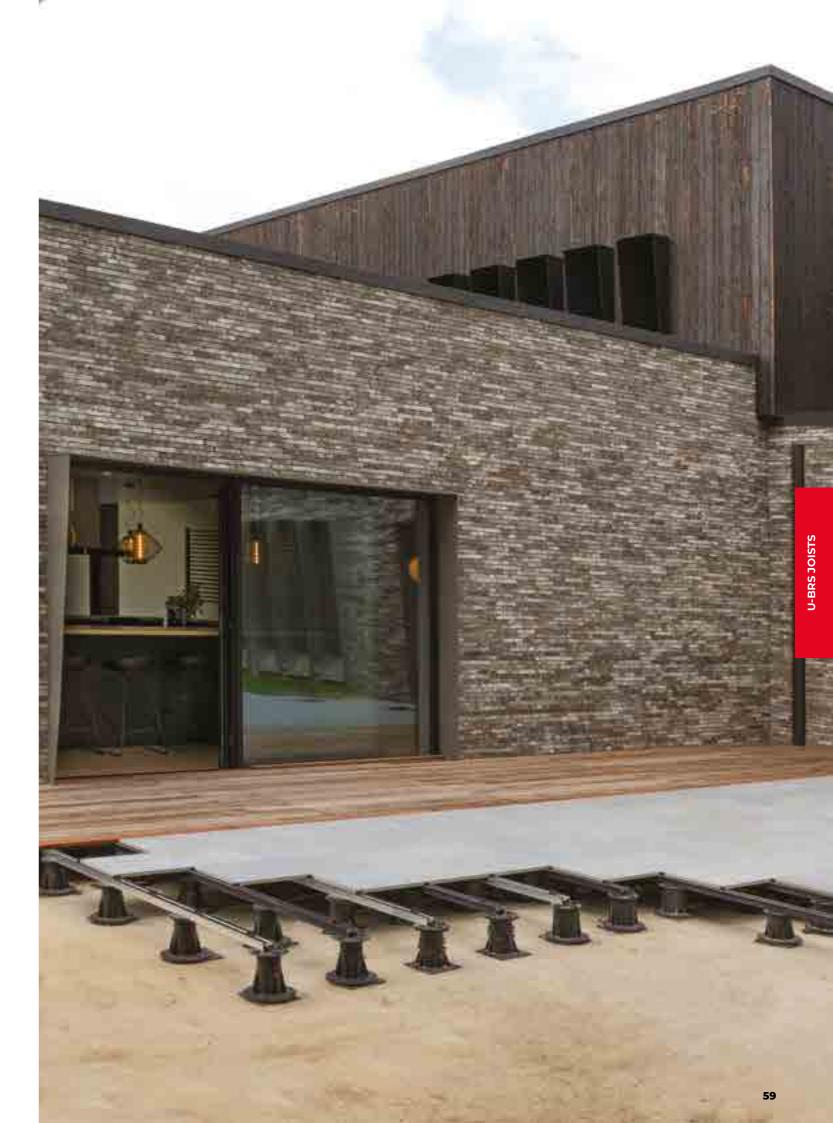

61



The **U-BRS-WOOD** system system will facilitate the realisation of your wooden terrace with aluminium joists. Our system is compatible with most wooden boards and fastenings.



NEW
NEW
U-BRS-WOOD-M
D-BRS-WOOD-B
Anodising provides:

24 mm


U-BRS-WOOD-B: Aluminium joists (2400 x 60 mm)

Joists with anodising are available (U-BRS WOOD-B) and without anodising (U-BRS WOOD-M)




- Resistance to erosion
- Resistance to atmospheric pollutants
- Resistance to corrosion (corrosive elements are chlorine, wet concrete, sea water, sand, and salt)

Black (U-BRS WOOD-B) joists are therefore recommended for pool sites or on coasts.

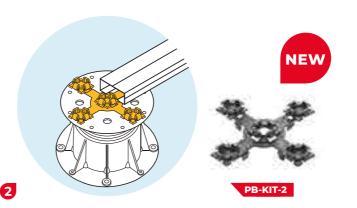

PB-KIT-2: Joist support It secures the joist to the top of pedestal simply by pressing. Once the PB-KIT-2 is installed on the pedestal, just press the joist on the pedestal and the profiled base of the joist is attached automatically





PB-KIT-8

It is also possible to use our **PB-KIT-8** universal fastening.



The spacing system between the wooden boards depends on the boards chosen.

The U-BRS END, U-BRS TABS, U-BRS STOP and U-BRS CONNECTOR are not compatible with the U-BRS WOOD system.



WOODEN BOARDS AND THEIR FASTENINGS: Not supplied by Buzon®!

Our aluminium joist system is compatible with most wooden boards and fastenings. We advise you to request more information from your wooden board supplier.





Pricing and packaging (ex. VAT)



U-PAD GROUND

U-PAD GROUND

Dimensions: 200 x 200 x 3 mm

Weight: 72 gr

Quantity per box: **24 pcs**





U-PAD GROUND

Dimensions: 200 x 200 x 6 mm

Weight: 180 gr

Quantity per box: 24 pcs





SCREWED PEDESTALS - DELIVERED SCREWED

PB-00

Height: 15 mm Weight: 142 gr

Quantity per box: 24 pcs





PB-01

Height: 28 - 42 mm Weight: 232 gr

Quantity per box: 24 pcs





U-PAD GROUND

Dimensions: 200 x 200 x 10 mm

Weight: 290 gr

Quantity per box: 24 pcs





PB-1

Height: 42 - 60 mm Weight: 309 gr

Quantity per box: 24 pcs





PB-2

Height: 60 - 90 mm Weight: 389 gr

Quantity per box: 24 pcs





PB-3

Height: 90 - 145 mm Weight: 492 gr

Quantity per box: 24 pcs





PB-4

Height: **145 - 245 mm** Weight: 690 gr

Quantity per box: 24 pcs





Unless otherwise agreed, our prices (ex. VAT) may vary depending on the increase in our purchase prices, salaries, social or fiscal charges and other events that are susceptible to objective appraisal. Each new price cancels and replaces previous conditions with immediate effect.

Unless otherwise agreed, our prices (ex. VAT) may vary depending on the increase in our purchase prices, social or fiscal charges and other events that are susceptible to objective appraisal. Each new price cancels and replaces previous conditions with immediate effect.

COMPOUND PEDESTALS - DELIVERED UNSCREWED

PB-5

Height: 230 - 315 mm Weight: 890 gr

Quantity per box: **24 pcs**







PB-6

Height: **285 - 367 mm** Weight: 970 gr

Quantity per box: 24 pcs











COMPOUND PEDESTALS - DELIVERED UNSCREWED

PB-9

Height: **560 - 715 mm** Weight: **1.81 kg**

Quantity per box: 24 pcs









PB-10

Height: **675-830 mm** Weight: 2.09 kg













PB-7

Height: **365 - 480 mm** Weight: 1.25 kg

Quantity per box: 24 pcs









PB-8

Height: **480 - 595 mm** Weight: **1.53 kg**















Unless otherwise agreed, our prices (ex. VAT) may vary depending on the increase in our purchase prices, salaries, social or fiscal charges and other events that are susceptible to objective appraisal. Each new price cancels and replaces previous conditions with immediate effect.

Unless otherwise agreed, our prices (ex. VAT) may vary depending on the increase in our purchase prices, social or fiscal charges and other events that are susceptible to objective appraisal. Each new price cancels and replaces previous conditions with immediate effect.

ELEMENTS FOR PEDESTALS COMPOSED OF PB-5 TO PB-11

PB-3-TOP

Weight: 250 gr

Quantity per box: 24 pcs





Top to compose the PB-5

PB-4-TOP

Weight: 330 gr

Quantity per box: 24 pcs





Top to compose pedestals PB-6 to PB-11

PB-C1

Weight: 280 gr

Quantity per box: 24 pcs



PB-C2

Weight: 480 gr

Quantity per box: 24 pcs





Riser sleeve

PB-4-BASE

Weight: 360 gr

Quantity per box: 24 pcs





Riser sleeve

Base to compose pedestals PB-5 to PB-11

PB-0-S18 AND ACCESSORIES

PB-0-S18

Height: 18 - 28 mm Weight: 196 gr

Quantity per box: 24 pcs





Pedestal

PB-0-S18 + TABS 2 mm

Height: 18 - 28 mm Weight: 210 gr

Quantity per box: 24 pcs



PB-0-S-TABS



Pedestal + Spacer tab

PB-0-S18 + TABS 3 mm

Height: 18 - 28 mm Weight: 211 gr

Quantity per box: 24 pcs



PB-0-S-TABS



Pedestal + Spacer tab

PB-0-S18 + TABS 4.5 mm

Height: 18 - 28 mm Weight: 212 gr

Quantity per box: 24 pcs



PB-0-S-TABS



Pedestal + Spacer tab

PB-0-S-TABS 2mm

Height: 17 mm Width: 2 mm Weight: 14 gr

Quantity per box: 120 pcs



PB-0-S-TABS



Spacer tab

PB-0-S-TABS 3mm

Height: 17 mm Width: 3 mm Weight: 15 gr

Quantity per box: 120 pcs





Spacer tab

PB-0-S-TABS 4.5 mm

Height: 17 mm Width: 4.5 mm Weight: 16 gr

Quantity per box: 120 pcs





Spacer tab

DPH-KIT-5

Height: 28 mm Weight: 25 gr

Quantity per box: **120 pcs**





Joist support



Unless otherwise agreed, our prices (ex. VAT) may vary depending on the increase in our purchase prices, social or fiscal charges and other events that are susceptible to objective appraisal. Each new price cancels and replaces previous conditions with immediate effect.

PRICING AND PACKAGING

NEW

ACCESSORIES AVAILABLE FOR ALL MODELS OF PEDESTALS

PB-TABS 2 mm

Height: 17 mm Width: 2 mm Weight: 18 gr







Spacer tab

PB-TABS 3 mm

Height: 17 mm Width: 3 mm Weight: 18 gr

Quantity per box: 120 pcs





Spacer tab

PB-TABS 4.5 mm

Height: 17 mm Width: 4.5 mm Weight: 19 gr

Quantity per box: 120 pcs



Spacer tab

PB-TABS 6 mm

Height: 17 mm Width: 6 mm Weight: 19 gr

Quantity per box: 120 pcs





Spacer tab

PB-TABS 8 mm

Height: 17 mm Width: 8 mm Weight: 20 gr

Quantity per box: 120 pcs





Spacer tab

PB-TABS 10 mm

Height: 17 mm Width: 10 mm Weight: 21 gr

Quantity per box: 120 pcs





Spacer tab

U-E10

Thickness: 1 mm Weight: 18 gr

Quantity per box: 480 pcs





Leveller

U-E20

Thickness: 2 mm Weight: 32 gr

Quantity per box: 240 pcs





Leveller

ACCESSORIES AVAILABLE FOR ALL MODELS OF PEDESTALS

PB-KIT-5

Height: 28 mm Weight: 30 gr

Quantity per box: 24 pcs



Joist support

U-SHIM

Thickness: 5 mm Weight: 78 gr



Quantity per box: 24 pcs



Riser

U-PH5

Weight: 192 gr

Quantity per box: 24 pcs





Slope corrector

U-KIT-SL-80

Weight: **177 gr**

Quantity per box: 1 pc





Spirit level

U-WALL

Weight: 39 gr € 1.13

Quantity per box: 24 pcs





Wall separator

U-E10-WALL

Thickness: 1 mm Weight: 26 gr

Quantity per box: 480 pcs



U-E10-WALL



Leveller

U-E20-WALL

Thickness: 2 mm Weight: 43 gr

Quantity per box: 240 pcs





Leveller

PB FASTENER Weight: 9 gr

Quantity per box: 600 pcs







Fastening for wooden pavers

Unless otherwise agreed, our prices (ex. VAT) may vary depending on the increase in our purchase prices, salaries, social or fiscal charges and other events that are susceptible to objective appraisal. Each new price cancels and replaces previous conditions with immediate effect.

Unless otherwise agreed, our prices (ex. VAT) may vary depending on the increase in our purchase prices, salaries, social or fiscal charges and other events that are susceptible to objective appraisal. Each new price cancels and replaces previous conditions with immediate effect.

ACCESSORIES AVAILABLE FOR ALL MODELS OF PEDESTALS



PB-END-INOX











Unless otherwise agreed, our prices (ex. VAT) may vary depending on the increase in our purchase prices, salaries, social or fiscal charges and other events that are susceptible to objective appraisal. Each new price cancels and replaces previous conditions with immediate effect.

ACCESSORIES AVAILABLE FOR ALL MODELS OF PEDESTALS



Key to adjust the height of the pedestals

Paving support at the edge of the terrace



Weight: 26 gr

PB-KEY

Quantity per box: 480 pcs





Quantity per box: 240 pcs

U-E20-EDGE

Thickness: 2 mm

Weight: 43 gr

U-EDGE

Weight: 86 gr

per box: 24 pcs

Quantity

U-EDGE



Leveller



Height: 17 mm Width: 2 mm Weight: 1 gr

Quantity per box: 1,200 pcs

U-Tabs 4.5 mm

Height: 17 mm

Width: 4.5 mm

per box: 1,200 pcs

Weight: 1 gr

Quantity

U-TABS





Spacer tab

Spacer tab

U-Tabs 3 mm Height: 17 mm

U-E20-EDGE

Width: 3 mm Weight: 1 gr

Quantity per box: 1,200 pcs





Spacer tab

U-TABS SPIKE 2 mm

Width: 2 mm Spike height: 50 mm Weight: 16 gr

Quantity per box: 120 pcs





Spacer tab

Unless otherwise agreed, our prices (ex. VAT) may vary depending on the increase in our purchase prices, social or fiscal charges and other events that are susceptible to objective appraisal. Each new price cancels and replaces previous conditions with immediate effect.

75

ACCESSORIES AVAILABLE FOR ALL MODELS OF PEDESTALS

U-TABS SPIKE 3 mm

Width: 3 mm Spike height: 50 mm Weight: 17 gr

Quantity per box: **120 pcs**



SPIKE



U-TABS SPIKE 4.5 mm

Width: 4.5 mm Spike height: 50 mm Weight: 18 gr

Quantity per box: 120 pcs





U-PAD

Dimensions: 200 x 200 x 3 mm Weight: 95 gr

Quantity per box: 24 pcs



Rubber protection


U-PAD

Dimensions: 200 x 200 x 6 mm

Weight: 175 gr







Rubber protection

U-PAD

Dimensions: 200 x 200 x 10 mm

Weight: 280 gr

Quantity per box: 24 pcs



U-PAD

Dimensions: 200 x 100 x 3 mm

Weight: 47 gr

Quantity per box: 24 pcs





Rubber protection

U-PAD

Dimensions: 200 x 100 x 6 mm

Weight: 140 gr





74



Rubber protection

Rubber protection

U-PAD

Dimensions: 90 x 60 x 6 mm

Weight: 26 gr

Quantity per box: 24 pcs





Rubber protection

ACCESSORIES AVAILABLE FOR ALL MODELS OF PEDESTALS

U-PAD

Dimensions: 90 x 60 x 10 mm Weight: 43 gr

Quantity per box: 24 pcs





Rubber protection

U-TABS FLAT 2 mm

Height: 17 mm Width: 2 mm Weight: 13 gr

Quantity per box: 120 pcs



Spacer tab

U-TABS FLAT 3 mm

Height: 17 mm Width: 3 mm Weight: 14 gr

Quantity per box: 120 pcs





Spacer tab

U-TABS FLAT 4.5 mm

Height: 17 mm Width: 4.5 mm Weight: 15 gr

Quantity per box: 120 pcs





Spacer tab

U-WASHER Stainless steel (316)

Diameter: **35 - 50 mm** Weight: 7 g - 12 g

Quantity per box: 240 pcs





Anti-lift washer

U-WASHER Iron Grey (RAL 7011)

Diameter: 35 - 50 mm Weight: 6 g - 12 g

Quantity per box: 1,200 pcs





Anti-lift washer

U-WASHER Window Grey (RAL 7040)

Diameter: **35 - 50 mm** Weight: 6 g - 12 g

Quantity per box: 1,200 pcs



Anti-lift washer

U-WASHER Warm Grey (RAL 1019)

Diameter: 35 - 50 mm Weight: **6 g - 12 g**

Quantity per box: 1,200 pcs





Anti-lift washer

Unless otherwise agreed, our prices (ex. VAT) may vary depending on the increase in our purchase prices, salaries, social or fiscal charges and other events that are susceptible to objective appraisal. Each new price cancels and replaces previous conditions with immediate effect.

Unless otherwise agreed, our prices (ex. VAT) may vary depending on the increase in our purchase prices, social or fiscal charges and other events that are susceptible to objective appraisal. Each new price cancels and replaces previous conditions with immediate effect.

PRICING AND PACKAGING

ACCESSORIES AVAILABLE FOR ALL MODELS OF PEDESTALS

U-WASHER Light ivory (RAL 1015)

Diameter: 35 - 50 mm Weight: **6 g - 12 g**

Quantity per box: **1,200 pcs**





Anti-lift washer

U-WASHER Signal Black (RAL 9004)

Diameter: 35 - 50 mm Weight: **6 g - 12 g**

Quantity per box: 1,200 pcs





Anti-lift washer

U-WASHER Polycarbonate

Diameter: 35 mm Weight: **6 g - 12 g**

Quantity per box: **1,200 pcs**





Anti-lift washer

U-WASHER VIS

Weight: 3 gr

Quantity per box **500 pcs**





Fastening screw

PB-KIT-1

Weight: 2 gr

Quantity per box: **3,000 pcs**





Fastening

U-BRS SYSTEM (ALUMINIUM JOIST)

U-BRS-24MM-B

Height: 24 mm Length: 2,400 mm Weight: 2.23 kg

Quantity per pallet: 198 pcs







U-BRS-38MM-B

Height: 38 mm Length: 2,400 mm Weight: 2.57 kg







NEW

NEW

NEW

U-BRS-24MM-M

Height: 24 mm Length: 2,400 mm Weight: 2.23 kg

Quantity per pallet: 198 pcs





Joist Without coating

NEW

Quantity per pallet: 126 pcs

U-BRS-38MM-M

Length: 2,400 mm

Height: 38 mm

Weight: 2.57 kg





Joist Without coating

U-BRS-EPDM

Height: 2 mm Weight: 130 gr Length: 2,400 mm

Quantity per box: 85 pcs



EPDM protection

PB-KIT-2

Weight: 26 gr







Support for U-BRS joist

PB-KIT-8-0-S

Weight: 9 gr

Quantity



NEW

Weight: 1 gr

Rack Plug Large




Quantity

Rack Plug Large



Fixation pour PB-0-S-18

Fastening



Unless otherwise agreed, our prices (ex. VAT) may vary depending on the increase in our purchase prices, social or fiscal charges and other events that are susceptible to objective appraisal. Each new price cancels and replaces previous conditions with immediate effect.

PRICING AND PACKAGING

U-BRS SYSTEM (ALUMINIUM JOIST)



Quantity per box: **10,000 pcs**



Fastening

U-FIX-PLATE 5

Weight: 82 gr



NEW

NEW

NEW

Quantity per box: 120 pcs





Support for U-BRS joist

U-BRS TABS

Height: 17 mm Width: 2 mm Weight: 5 gr





U-BRS TABS Spacer tab

Height: 17 mm Width: 3 mm Weight: 5 gr

U-BRS TABS





Spacer tab

U-BRS TABS

Height: 17 mm Width: 4.5 mm Weight: 5 gr

Quantity per box: 240 pcs



U-BRS TABS

NEW

NEW

NEW



Spacer tab

U-BRS-STOP

Weight: 5 gr







Tile stop

U-BRS-END-T

Weight: 25 gr







Finishing kit

U-BRS-END-B

Weight: 15 gr

U-BRS-END-B





Finishing kit

U-BRS SYSTEM (ALUMINIUM JOIST)

U-BRS-CONNECTOR

Weight: 19 gr







Connecteur

U-BRS-END-CONNECTOR

Weight: 19 gr



U-BRS-END-CONNECTOR

Connecteur

NEW

U-BRS-VIS

Weight: 2 gr







NEW

Fastening screws

U-BRS-WOOD-B-24

Height: 24 mm Length: 2,400 mm Weight: 1.52 kg

Quantity per pallet: 198 pcs





U-BRS-WOOD-M-24

Height: 24 mm Length: 2,400 mm Weight: 1.52 kg

Quantity per pallet: 198 pcs





Unless otherwise agreed, our prices (ex. VAT) may vary depending on the increase in our purchase prices, salaries, social or fiscal charges and other events that are susceptible to objective appraisal. Each new price cancels and replaces previous conditions with immediate effect.

Unless otherwise agreed, our prices (ex. VAT) may vary depending on the increase in our purchase prices, social or fiscal charges and other events that are susceptible to objective appraisal. Each new price cancels and replaces previous conditions with immediate effect.

81

PEDESTAL PRICE + SPACER TABS*

Code	Height
PB-00	15 mm (Fixed)
PB-0-S18	18 - 28 mm (Screwed)
PB-01	28 - 42 mm (Screwed)
PB-1	42 - 60 mm (Screwed)
PB-2	60 - 90 mm (Screwed)
PB-3	90 - 145 mm (Screwed)
PB-4	145 - 245 mm (Screwed)
PB-5	230 - 315 mm (Not screwed)
PB-6	285 - 367 mm (Not screwed)
PB-7	365 - 480 mm (Not screwed)
PB-8	480 - 595 mm (Not screwed)
PB-9	560 - 715 mm (Not screwed)
PB-10	675 - 830 mm (Not screwed)
PB-11	755 - 955 mm (Not screwed)





PEDESTAL PRICES + SPACER TABS* + LEVELLER (U-E20)

Code	Height
PB-00	15 mm (Fixed)
PB-0-S18	18 - 28 mm (Screwed)
PB-01	28 - 42 mm (Screwed)
PB-1	42 - 60 mm (Screwed)
PB-2	60 - 90 mm (Screwed)
PB-3	90 - 145 mm (Screwed)
PB-4	145 - 245 mm (Screwed)
PB-5	230 - 315 mm (Not screwed)
PB-6	285 - 367 mm (Not screwed)
PB-7	365 - 480 mm (Not screwed)
PB-8	480 - 595 mm (Not screwed)
PB-9	560 - 715 mm (Not screwed)
PB-10	675 - 830 mm (Not screwed)
PB-11	755 - 955 mm (Not screwed)

^{*} price of the 2, 3 and 4.5 mm PB-Tabs



PEDESTAL PRICE + PB-KIT-5 JOIST SUPPORT

Code	Height
PB-00	15 mm (Fixed)
PB-0-S18/DPH-KIT-5	18 - 28 mm (Screwed)
PB-01	28 - 42 mm (Screwed)
PB-1	42 - 60 mm (Screwed)
PB-2	60 - 90 mm (Screwed)
PB-3	90 - 145 mm (Screwed)
PB-4	145 - 245 mm (Screwed)
PB-5	230 - 315 mm (Not screwed)
PB-6	285 - 367 mm (Not screwed)
PB-7	365 - 480 mm (Not screwed)
PB-8	480 - 595 mm (Not screwed)
PB-9	560 - 715 mm (Not screwed)
PB-10	675 - 830 mm (Not screwed)
PB-11	755 - 955 mm (Not screwed)



JOISTS + U-BRS-EPDM PROTECTION

Code	Height / Length
U-BRS-24-B	24 mm/2400 mm
U-BRS-38-B	38 mm/2400 mm
U-BRS-24-M	24 mm/2400 mm
U-BRS-38-M	38 mm/2400 mm



U-PAD-GROUND + U-TABS-FLAT

Code	Height
U-PAD GROUND 3 mm + U-TABS FLAT	3 mm
U-PAD GROUND 6 mm + U-TABS FLAT	6 mm
U-PAD GROUND 10 mm + U-TABS FLAT	10 mm

U-Tabs 2-3 and 4.5 mm



Unless otherwise agreed, our prices (ex. VAT) may vary depending on the increase in our purchase prices, social or fiscal charges and other events that are susceptible to objective appraisal. Each new price cancels and replaces previous conditions with immediate effect.

Unless otherwise agreed, our prices (ex. VAT) may vary depending on the increase in our purchase prices, salaries, social or fiscal charges and other events that are susceptible to objective appraisal. Each new price cancels and replaces previous conditions with immediate effect.

PACKAGING

SCREWED PEDESTALS


Code	kg	pcs		kg	boxes		
PB-00	0.142 kg	24	420 x 220 x 175 mm	3.81 kg	120	2,880	100 x 120 x 120 cm
PB-01	0.232 kg	24	600 x 400 x 120 mm	6.07 kg	80	1,920	100 x 120 x 220 cm
PB-1	0.309 kg	24	600 x 400 x 190 mm	8.02 kg	55	1,320	100 x 120 x 220 cm
PB-2	0.389 kg	24	600 x 400 x 270 mm	10.14 kg	40	960	100 x 120 x 220 cm
PB-3	0.492 kg	24	600 x 400 x 380 mm	12.71 kg	25	600	100 x 120 x 220 cm
PB-4	0.690 kg	24	600 x 400 x 610 mm	17.76 kg	15	360	100 x 120 x 220 cm

ELEMENTS FOR COMPOSED PEDESTALS

Code	kg p	ocs		kg bo	oxes a	pcs	
PB-3-TOP	0.250 kg	24	600 x 400 x 280 mm	6.56 kg	25	600	100 x 120 x 211 cm
PB-4-TOP	0.330 kg	24	610 x 410 x 455 mm	8.76 kg	25	600	100 x 120 x 243 cm
PB-4-BASE	0.360 kg	24	610 x 450 x 455 mm	8.42 kg	25	600	100 x 120 x 243 cm
PB-C1	0.280 kg	24	600 x 400 x 430 mm	7.62 kg	25	600	100 x 120 x 230 cm
PB-C2	0.480 ka	24	600 x 415 x 600 mm	14.66 kg	15	360	100 x 120 x 195 cm

ELEMENTS FOR THE PB-0-S18 PEDESTAL

Code	kg p	ocs		kg bo	oxes	pcs	
PB-0-S18	0.196 kg	24	600 x 400 x 85 mm	5.16 kg	120	2,880	100 x 120 x 219 cm
PB-0-S18 + Tabs	0.212 kg	24	600 x 400 x 105 mm	5.61 kg	100	2,400	100 x 120 x 225 cm
PB-0-S TABS 2 mm	0.014 kg	120	400 x 300 x 225 mm	2.69 kg	100	12,000	100 x 120 x 220 mm
PB-0-S TABS 3 mm	0.015 kg	120	400 x 300 x 225 mm	2.69 kg	100	12,000	100 x 120 x 220 mm
PB-0-S TABS 4.5 mm	0.016 kg	120	400 x 300 x 225 mm	2.69 kg	100	12,000	100 x 120 x 220 mm
DPH-KIT 5	0.025 kg	120	400 x 290 x 210 mm	3.40 kg	110	13,200	100 x 120 x 225 cm





Box weight + pedestal / accessory



Box dimensions






Qty / pallet



Cartons / pallet



ACCESSORIES

Code	kg	pcs		kg	boxes	pcs	
PB-TABS-2 mm	0.018 kg	120	400 x 290 x 200 mm	2.47 kg	100	12,000	100 x 120 x 240 cm
PB-TABS-3 mm	0.018 kg	120	400 x 290 x 200 mm	2.59 kg	100	12,000	100 x 120 x 240 cm
PB-TABS-4.5 mm	0.019 kg	120	400 x 290 x 200 mm	2.71 kg	100	12,000	100 x 120 x 240 cm
PB-TABS-6 mm	0.019 kg	120	400 x 290 x 200 mm	2.71 kg	100	12,000	100 x 120 x 240 cm
PB-TABS-8 mm	0.020 kg	120	400 x 290 x 200 mm	2.83 kg	100	12,000	100 x 120 x 240 cm
PB-TABS-10 mm	0.021 kg	120	400 x 290 x 200 mm	2.95 kg	100	12,000	100 x 120 x 240 cm
U-E10	0.018 kg	480	400 x 300 x 160 mm	8.99 kg	48	23,040	80 x 120 x 110 cm
U-E20	0.032 kg	240	400 x 300 x 160 mm	8.10 kg	48	11,520	80 x 120 x 110 cm
PB-KIT-5	0.030 kg	24	400 x 300 x 110 mm	1.10 kg	180	4,320	80 x 120 x 228 cm
U-SHIMS-5 mm	0.078 kg	24	215 x 215 x 140 mm	1.99 kg	280	6,720	100 x 120 x 220 cm
U-PH5	0.192 kg	24	495 x 305 x 250 mm	5.71 kg	64	1,536	100 x 120 x 215 cm
U-KIT-SL-80	0.177 kg	1	235 x 210 x 40 mm	0.273 kg	-	-	-
U-WALL	0.039 kg	24	220 x 220 x 65 mm	1.03 kg	620	14,880	100 x 120 x 220 cm
U-E10-WALL	0.026 kg	480	370 x 195 x 120 mm	12.7 kg	-	-	-
U-E20-WALL	0.043 kg	240	370 x 195 x 120 mm	10.53 kg	-	-	-
PB-FASTENER	0.009 kg	600	-	-	-	-	-
PB-END	0.082 kg	24	305 x 220 x 200 mm	2.28 kg	135	3,240	100 x 120 x 220 cm
PB-END-INOX	0.221 kg	12	300 x 220 x 140 mm	2.95 kg	-		
U-TILES	0.200 kg	24	610 x 240 x 240 mm	5.16 kg	64	1,536	100 x 120 x 220 cm
U-END-BASE	0.027 kg	120	400 x 300 x 260 mm	3.60 kg	80	9,600	100 x 120 x 220 cm
U-END-LOCK	0.012 kg	120	400 x 300 x 110 mm	3.60 kg	180	26,600	100 x 120 x 220 cm
U-LD-3050	1.22 kg	1	-	-	-	-	-
U-LD-5065	2.00 kg	1	-	-	-	-	-
U-WASHER- 35 mm	0.007kg	240	190 x 90 x 145 mm	1.85 kg	-	-	-
STAINLESS STEEL U-WASHER- 35 mm STANDARD COLOUR	0.006 kg	1,200	400 x 290 x 150 mm	7.49 kg	-	-	-
U-WASHER- 35 mm POLYCARBONATE	0.006 kg	1,200	400 x 290 x 150 mm	7.49 kg	-	-	-
U-WASHER VIS	0.003 kg	500	190 x 90 x 145 mm	1.73 kg	-	-	-
PB-KEY	0.01 kg	1	320 x 140 x 25 mm	0.01 kg	-	-	-
U-EDGE	0.086 kg	24	300 x 250 x 155 mm	2.28 kg	208	4,992	100 x 120 x 217 cm
U-E10-EDGE	0.026 kg	480	250 x 250 x 250 mm	13.00 kg	60	28,800	80 x 120 x 160 cm
U-E20-EDGE	0.043 kg	240	250 x 250 x 250 mm	10.06 kg	60	14,400	80 x 120 x 160 cm
U-TABS-2 mm	0.001 kg	1,200	410 x 320 x 95 mm	1.57 kg	-	-	-
U-TABS-3 mm	0.001 kg	1,200	410 x 320 x 95 mm	1.57 kg	-		-
U-TABS-4.5 mm	0.001 kg	1,200	410 x 320 x 95 mm	1.57 kg	-	-	-
U-TABS SPIKE 2 mm	0.016 kg	120	400 x 300 x 225 mm	2.42 kg	90	10,800	100 x 120 x 220 cm
U-TABS SPIKE 3 mm	0.017 kg	120	400 x 300 x 225 mm	2.54 kg	90	10,800	100 x 120 x 220 cm
U-TABS SPIKE 4.5 mm	0.018 kg	120	400 x 300 x 225 mm	2.66 kg	90	10,800	100 x 120 x 220 cm
PB-KIT-1	0.002 kg	3,000	400 x 290 x 200 mm	6.49 kg		-	-



Weight of pedestal / accessory



Box weight + pedestal / accessory



Box dimensions



Pieces / box



Qty / pallet



Cartons / pallet



Pallet dimensions

U-PAD RUBBER PROTECTION

Code	kg	ocs		kg	boxes	pcs	
U-PAD 200 x 200 x 3 mm	0.095 kg	24	400 x 200 x 40 mm	2.05 kg	-	-	-
U-PAD 200 x 200 x 6 mm	0.175 kg	24	400 x 200 x 77 mm	4.05 kg	-	-	-
U-PAD 200 x 200 x 10 mm	0.280 kg	24	400 x 200 x 125 mm	7.20 kg	-	-	-
U-PAD 200x100x3 mm	0.047 kg	24	310 x 200 x 25 mm	1.18 kg	-	-	-
U-PAD 200 x 100 x 6 mm	0.140 kg	24	310 x 200 x 48 mm	2.45 kg	-	-	-
U-PAD 90 x 60 x 6 mm	0.026 kg	24	270 x 120 x 25 mm	0.66 kg	-	-	-
U-PAD 90 x 60 x 10 mm	0.043 kg	24	270 x 120 x 45 mm	1.01 kg	-	-	-

U-PAD GROUND AND U-TABS FLAT

Code	kg	pcs		kg box	xes 💮		
U-PAD GROUND 3 mm	0.072 kg	24	400 x 200 x 40 mm	1.72 kg	-	-	-
U-PAD GROUND 6 mm	0.180 kg	24	400 x 200 x 77 mm	4.32 kg	-	-	-
U-PAD GROUND 10 mm	0.290 kg	24	400 x 200 x 125 mm	6.96 kg	-	-	-
U-TABS FLAT 2 mm	0.013 kg	120	400 x 290 x 150 mm	1.86 kg	130	15,600	100 x 120 x 220 cm
U-TABS FLAT 3 mm	0.014 kg	120	400 x 290 x 150 mm	1.98 kg	130	15,600	100 x 120 x 220 cm
U-TABS FLAT 4.5 mm	0.015 kg	120	400 x 290 x 150 mm	2.22 kg	130	15,600	100 x 120 x 220 cm

U-BRS SYSTEM

Code	kg	pcs		box	es		
U-BRS-24 mm	2.23 kg	1	2400 x 65 x 24 mm	2.23 kg	198	198	240 x 60 x 70 cm
U-BRS-38 mm	2.57 kg	1	2400 x 60 x 38 mm	2.57 kg	126	126	240 x 60 x 68 cm
PB-KIT-2	0.026 kg	120	400 x 300 x 410 mm	3.72 kg	50	6,000	100 x 120 x 220 cm
PB-KIT-8	0.008 kg	120	410 x 325 x 110 mm	1.35 kg	160	19,200	100 x 120 x 220 cm
U-BRS-TABS-2 mm	0.005 kg	240	400 x 300 x 125 mm	1.56 kg	160	38,400	100 x 120 x 220 cm
U-BRS-TABS-3 mm	0.005 kg	240	400 x 300 x 125 mm	1.56 kg	160	38,400	100 x 120 x 220 cm
U-BRS-TABS-4.5 mm	0.005 kg	240	400 x 300 x 125 mm	1.56 kg	160	38,400	100 x 120 x 220 cm
PB-KIT-8-0-S	0.009 kg	120	410 x 325 x 110 mm	1.35 kg	160	19,200	100 x 120 x 220 cm
U-FIX-PLATE-5	0.082 kg	120	550 x 375 x 275 mm	10.64 kg	35	4,200	100 x 120 x 220 cm
Rack Plug Large	0.001 kg						
Pin Tube	0.001 kg	10,000					
U-BRS-EPDM-2 mm	0.130 kg	85	525 x 525 x 250 mm	14.50 kg	-	-	-
U-BRS-STOP	0.005 kg	1,000	335 x 310 x 225 mm	5.10 kg	-	-	-
U-BRS-END-T	0.025 kg	150	335 x 310 x 225 mm	3.42 kg	-	-	-
U-BRS-END-B	0.015 kg	300	335 x 310 x 225 mm	4.55 kg	-	-	-
U-BRS-END-CONNECTOR	0.019 kg	250	335 x 310 x 225 mm	4.90 kg	-	-	-
U-BRS CONNECTOR	0.019 kg	250	335 x 310 x 225 mm	4.90 kg			
U-BRS-VIS	0.002 kg	1,000	100 x 90 x 90 mm	1.81 kg	-	-	-
U-BRS WOOD-24	1.52 kg	1	2400 x 65 x 18 mm	1.52 kg	198	198	240 x 60 x 70 cm



Weight of pedestal / accessory



Box weight + pedestal / accessory



Box dimensions






Qty / pallet




Cartons / pallet



Pallet dimensions

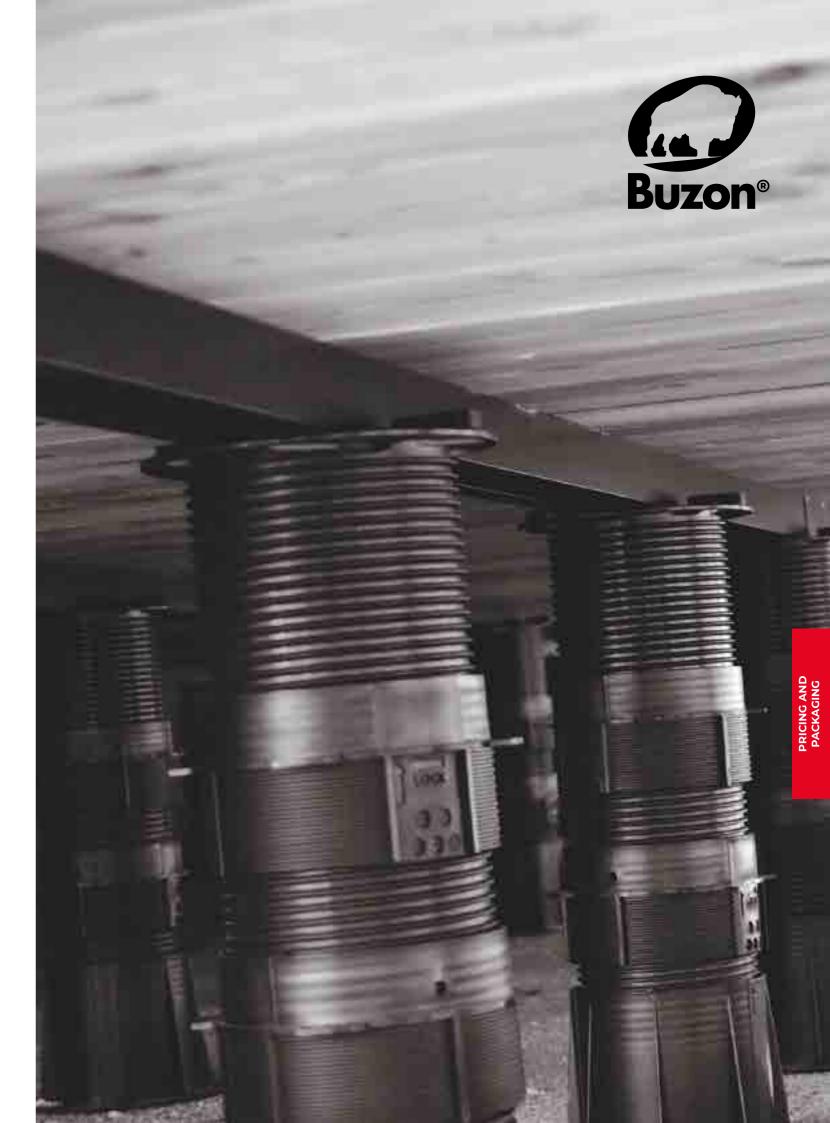

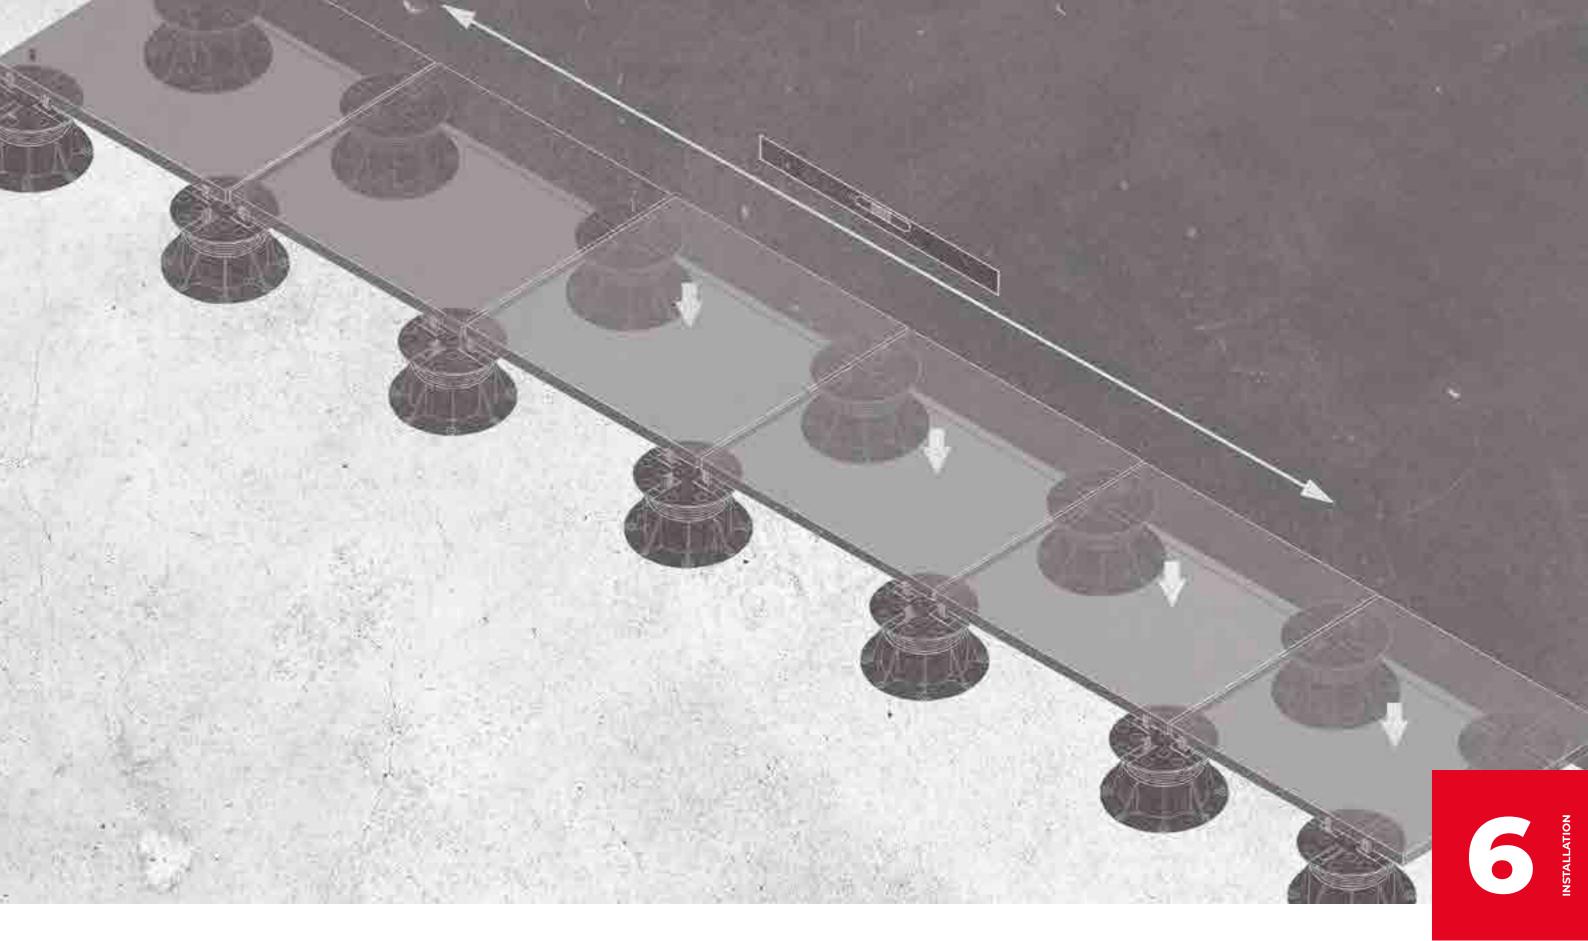



Technical and Installation

Technical information and use

STANDARD SYSTEM / PEDESTALS

AVERAGE NUMBER OF PEDESTALS PER m²

Dimensions and surface area of the terrace	20 m²	50 m²	100 m²	1,000 m²
Length	5	10	10	50
Width	4	5	10	20
Paver format	Pedestals / m²	Pedestals / m²	Pedestals / m²	Pedestals / m²
40 x 40 cm	7.70	7.28	6.76	6.43
50 x 50 cm	4.95	4.62	4.41	4.14
60 x 60 cm	4.00	3.60	3.24	2.94
75 x 75 cm	4.90	4.36	4.21	3.71
80 x 80 cm	4.15	4.06	3.65	3.24
90 x 90 cm	6.00	5.76	5.76	5.15
100 x 100 cm	4.95	4.62	4.41	4.14
120 x 30 cm	7.50	6.48	6.30	5.78
120 x 40 cm	5.50	5.04	4.68	4.34
120 x 60 cm	4.00	3.60	3.24	2.98
90 x 45 cm	6.00	5.76	5.76	5.15
120 x 120 cm	4.00	3.60	3.24	2.94
45 x 45 cm	6.00	5.76	5.76	5.15
60 x 30 cm	7.50	6.48	6.30	5.78
60 x 40 cm	5.50	5.04	4.68	4.34
40 x 80 cm	7.70	7.28	6.76	6.43
50 x 100 cm	4.95	4.62	4.41	4.14
180 x 30 cm	7.50	6.48	6.30	5.78
160 x 30 cm	7.7	7.18	6.8	6.47


The use of pedestals is recommended for pavers of minimum 30×30 cm, in agreement with the tile setter. For the laying of non-square pavers, the amount of pedestals used varies according to their place under the pavers. This information is given as an indication, the consumption varying according to the specificities of each project.

Buzon® cannot be held responsible for variations in quantities.





We advise the use of our pedestal calculator for more details.


Go to: www.buzon-calculator-pb.com

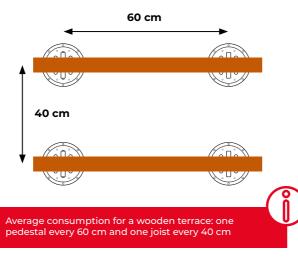

RECOMMENDED POSITIONS OF THE PEDESTALS UNDER THE PAVERS

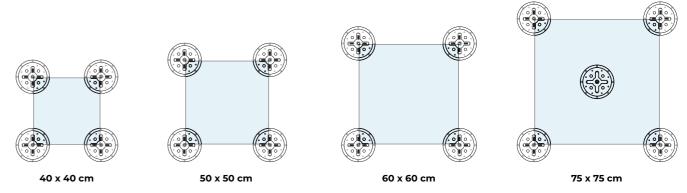

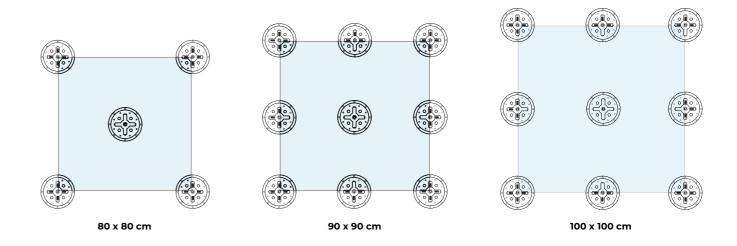

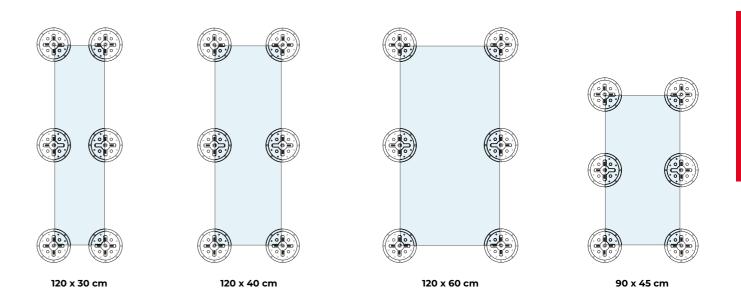

Technical information and consumption of pedestals

U-BRS/PEDESTAL SYSTEM

AVERAGE QUANTITY OF JOISTS, PEDESTALS AND ACCESSORIES (joist centre distance 60 cm)

Dimensions and surface area of the laying plan	10 m²	50 m²
Length	5 m	10 m
Width	2 m	5 m
Consumption:	pcs/m²	pcs/m²
U-BRS-24 / U-BRS-38	0.8	0.7
U-BRS EPDM 2 mm	1.6	1.4
U-BRS TABS:		
20 x 120 cm pavers	9.4	9.1
30 x 120 cm pavers	6.2	6.0
40 x 120 cm pavers	4.6	4.5
60 x 120 cm pavers	3.6	3.3
120 x 120 cm pavers	0.6	0.4
U-BRS-STOP / U-BRS-VIS	1.2	0.8
Pedestals (centre distance 60 cm)	4.00	3.4
Pedestals (centre distance 80 cm)	3.2	2.8

AVERAGE QUANTITY OF JOISTS, PEDESTALS AND ACCESSORIES (joist centre distance 40 cm)

Dimensions and surface area of the laying plan	10 m²	50 m²
Length	5 m	10 m
Width	2 m	5 m
Consumption:	pcs/m²	pcs/m²
U-BRS-24 / U-BRS-38	1.2	1.1
U-BRS EPDM 2 mm	2.4	2.2
U-BRS TABS		
20 x 120 cm pavers	11.3	11.0
30 x 120 cm pavers	7.5	7.2
40 x 120 cm pavers	5.5	5.4
80 x 80 cm pavers	2.4	1.9
60 x 120 cm pavers	4.3	4.0
U-BRS-STOP / U-BRS-VIS	1.2	0.8
Pedestals (centre distance 60 cm)	6.0	4.9
Pedestals (centre distance 80 cm) 👃	4.8	4.1


AVERAGE QUANTITY OF JOISTS, PEDESTALS AND ACCESSORIES (joist centre distance 45 cm)

Dimensions and surface area of the laying plan	10 m²	50 m²
Length	5 m	10 m
Width	2 m	5 m
Consumption:	pcs/m²	pcs/m²
U-BRS-24 / U-BRS-38	1.2	1
U-BRS EPDM 2 mm	2.4	2
U-BRS TABS:		
45 x 90 cm pavers	5.2	4.8
90 x 90 cm pavers	1.2	1.0
U-BRS-STOP / U-BRS-VIS	1.3	1.0
Pedestals (centre distance 60 cm) 🗛	5.5	4.6
Pedestals (centre distance 80 cm)	4.4	3.7


AVERAGE QUANTITY OF JOISTS, PEDESTALS AND ACCESSORIES (joist centre distance 50 cm)

Dimensions and surface area of the laying plan	10 m²	50 m²
Length	5 m	10 m
Width	2 m	5 m
Consumption:	pcs/m²	pcs/m²
U-BRS-24 / U-BRS-38	1	0.9
U-BRS EPDM 2 mm	2	1.8
U-BRS TABS:		
50 x 50 cm pavers	5.6	4.8
50 x 100 cm pavers	2.6	2.4
100 x 100 cm pavers	1.0	0.8
U-BRS-STOP / U-BRS-VIS	1.0	0.8
Pedestals (centre distance 60 cm) 🛕	5.0	4.2
Pedestals (centre distance 80 cm)	4.0	3.3


POSITION OF THE PEDESTALS UNDER U-BRS-24 mm





POSITION OF THE PEDESTALS UNDER U-BRS-38 mm

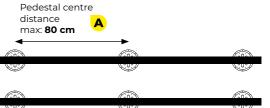


POSITION OF THE U-BRS JOISTS

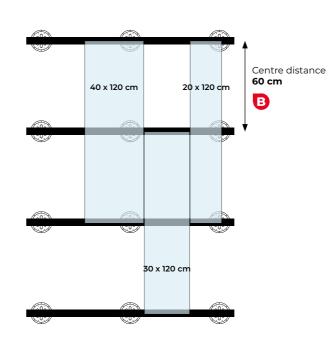

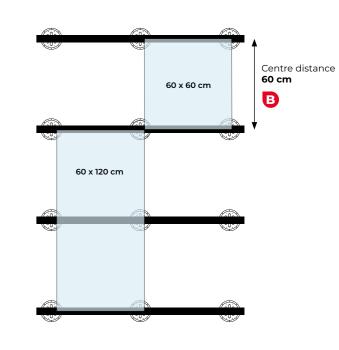

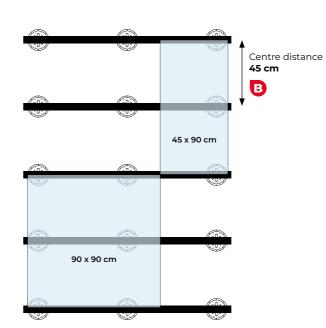

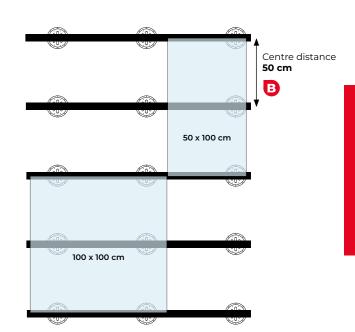




Technical information and use

U-BRS-WOOD/PEDESTAL SYSTEM

POSITION OF THE PEDESTALS UNDER U-BRS-24 mm



AVERAGE QUANTITY OF JOISTS, PEDESTALS AND ACCESSORIES (joist centre distance 25 cm)

Dimensions and surface area of the laying plan	10 m²	50 m²
Length	5 m	10 m
Width	2 m	5 m
Consumption:	pcs/m²	pcs/m²
U-BRS-24	2	1.8
Pedestals (centre distance 60 cm)	10	8.4

AVERAGE QUANTITY OF JOISTS, PEDESTALS AND ACCESSORIES (joist centre distance 30 cm)

Dimensions and surface area of the laying plan	10 m²	50 m²
Length	5 m	10 m
Width	2 m	5 m
Consumption:	pcs/m²	pcs/m²
U-BRS-24	1.6	1.4
Pedestals (centre distance 60 cm)	8	6.8


AVERAGE QUANTITY OF JOISTS, PEDESTALS AND ACCESSORIES (joist centre distance 40 cm)

Dimensions and surface area of the laying plan	10 m²	50 m²
Length	5 m	10 m
Width	2 m	5 m
Consumption:	pcs/m²	pcs/m²
U-BRS-24	1.2	1.1
Pedestals (centre distance 60 cm)	6	4.9

AVERAGE QUANTITY OF JOISTS, PEDESTALS AND ACCESSORIES (joist centre distance 50 cm)

Dimensions and surface area of the laying plan	10 m²	50 m²
Length	5 m	10 m
Width	2 m	5 m
Consumption:	pcs/m²	pcs/m²
U-BRS-24	1	0.9

POSITION OF THE U-BRS WOOD JOISTS

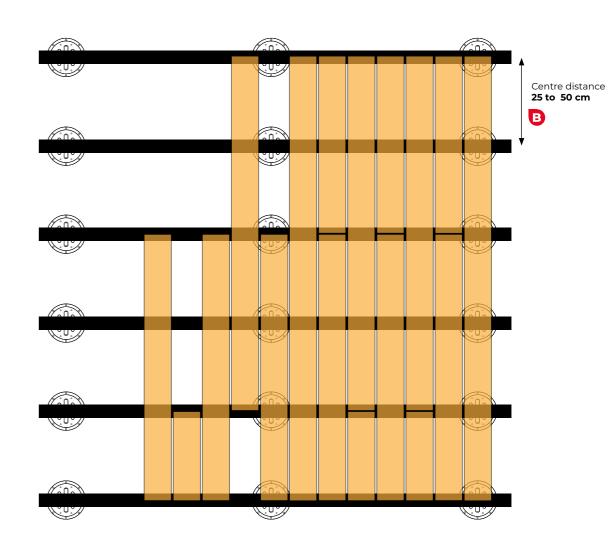


Laying tips

HOW TO START A TERRACE ON PEDESTALS?




PREPARE THE SUPPORT

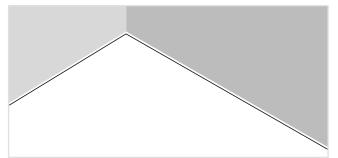


The laying on pedestals is performed on a stable support and clear of any bulky object.

LAYOUT

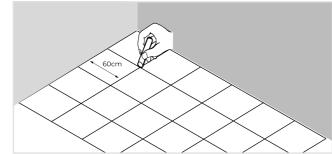


Square off the surface with chalk to facilitate the placement of the pedestals (e.g. pavers: $60 \times 60 \text{ cm}$)

SLOPE CORRECTOR ADJUSTMENT U-PH5

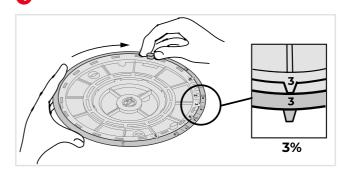


Set the corrector to the value of the slope. e.g. 3%

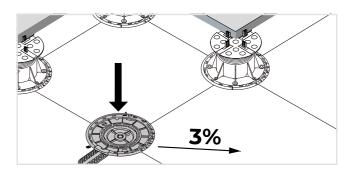


Place the corrector in the direction of the slope.


DETERMINE THE VALUE AND DIRECTION OF THE SUPPORT SLOPE (if necessary)

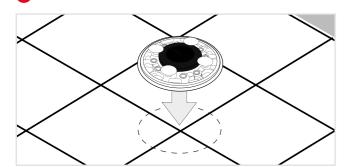

To determine the value and direction of the slope, position the spirit level at an intersection.

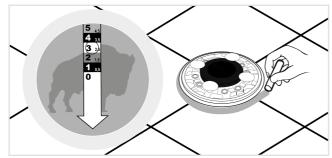


Orientate the spirit level to align the bubble with the number and draw a circle.

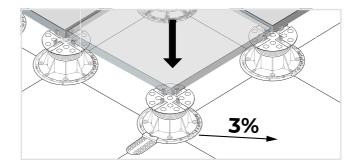


Place and adjust the pedestal to the right height.

The bubble indicates the value of the slope in %. The alignment of the numbers indicates the direction of the slope to be straightened. Draw the arrow and the number on the ground. Example 3%.

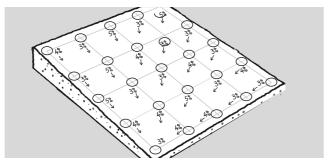

Repeat at each crossing. The percentage and direction may vary on each circle depending on soil unevenness.

ADJUSTING THE PEDESTAL

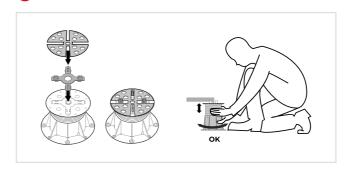

Adjust the pedestals to the desired height. Remove the spacer tabs according to the position under the paver and place a 2 mm leveller on each pedestal.

Prolonged exposure of the spirit level placed on the ground at a temperature above 25°C makes the bubble disappear. Put the spirit level in the shade!




Laying tips


HOW TO START A TERRACE ON PEDESTALS?




5 START A TERRACE ON PEDESTALS

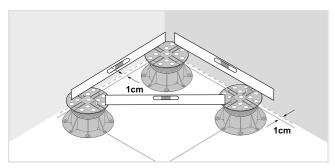


Place the first 3 pedestals. Check the level by adjusting the height of the pedestals.

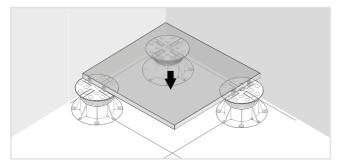


Place the first paver on the pedestals.

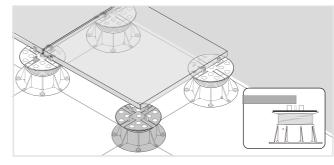


Place the next pedestal under the paver.

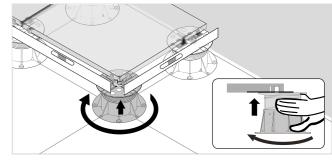


Adjust the height and level with respect to the other pedestals.

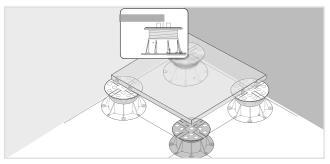


Place the fourth pedestal under the paver.

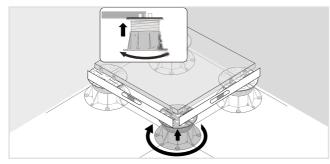


Adjust the height and level with respect to the other pedestals.

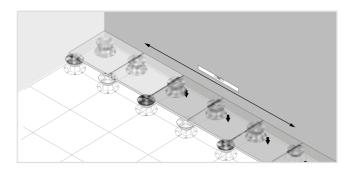


Check the flatness of the pavers on the first line of pavers.

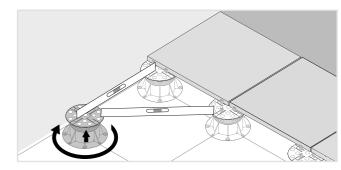


To start the second row of pedestals place the new pedestal and check the level relative to the other pedestals.

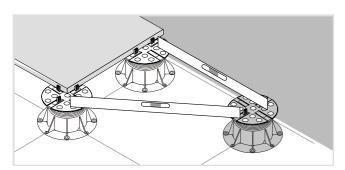


Place the next pedestal and adjust the level with respect to the other pedestals.

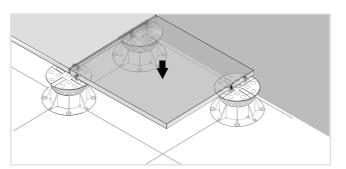

Place the next paver and repeat the operation.

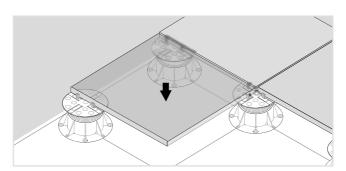

Place the paver on the pedestals.

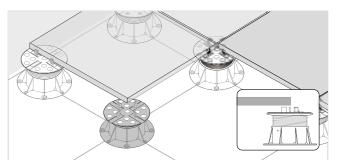


Place the pedestal under the paver, adjust the height and level with respect to the other pedestals...



Technical service

Beyond complete series of pedestals and terrace accessories, we offer personalised service in terms of technical support and assistance. We accompany our clients in the technical realisation of their projects. On request, Buzon® assists with the layout of the pavers, calculating the number of pedestals, the composition of the support systems and installation arrangements.

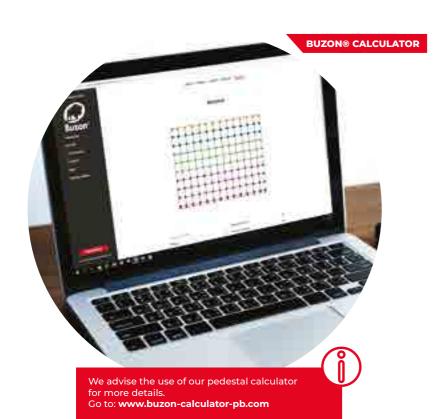




The secret of a perfect terrace on pedestals lies in the preparation. In this regard, Buzon® has developed a simple and fast application to help you with the implementation of your terrace on pedestals.

The Buzon®'calculator', which you can use after you register, determines the number of pedestals to be used and, above all, their position and height depending on the configuration of the project.


Whatever the size of the pavers and the terraces, whatever the slopes to be overcome, the "calculator" offers a real-time solution, making it easier to do the work.

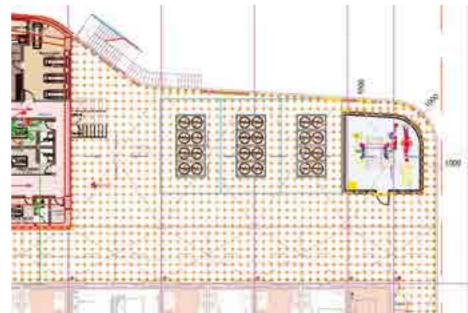

es.		00 1 + L020	+PA25 30m+245/WALL
쇒	231	PR 2 - UE30	HPADS SHIPE HD-EDCE+TURNSHIPE
_	**	PE3+UG9	rinkps Seuri
蠍	2616	# 1 + LRQD	-RADE Stews + TABLE
微	#4	HE 3 + LIEDE	4905 Stree 1 WALL
POTE.	100	PE 3 + UE20	*PAGS Jenn





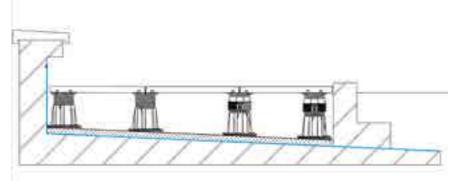

<mark>Ind</mark>ex

D

DPH-KIT-5	p.2	2

P

PB-00	p.2
PB-0-S18	p.22, 26-2
PB-01	p.2
PB-1	p.2
PB-2	p.2
PB-3	p.2
PB-4	p.2
PB-5	p.2
PB-6	p.2
PB-7	p.2
PB-8	p.2
PB-9	p.2
PB-10	p.2
PB-11	p.2
PB-C1	p.2
PB-C2	p.2
PB-END	p.4
PB-END INOX	p.4.
PB-FASTENER	p.5
PB-KEY	p.7

PB-KIT-1	p.51
PB-KIT-2	p.57
PB-KIT-5	p.36
PB- KIT-8	p.48, 57
PB- KIT-8-0-S	p.57
PB-3-TOP	p.24
PB-4-BASE	p.24
PB-4-TOP	p.24
PB-TABS 2 mm	p.33
PB-TABS 3 mm	p.33
PB-TABS 4.5 mm	p.33
PB-TABS 6 mm	p.33
PB-TABS 8 mm	p.33
PB-TABS 10 mm	p.33
PB-0-S-TABS 2 mm	p.26
PB-0-S-TABS 3 mm	p.26
PB-0-S-TABS 4.5 mm	p.26
PIN TUBE	p.57
RACK PLUG SMALL	p.57

U

U-BRS 24 mm	p.56
U-BRS 38 mm	p.56
U-BRS CONNECTOR	p.58
U-BRS-END	p.58
U-BRS-END-CONNECTOR	p.58
U-BRS-EPDM	p.58
U-BRS-STOP	p.58
U-BRS TABS 2 mm	p.58
U-BRS TABS 3 mm	p.58
U-BRS TABS 4.5 mm	p.58
U-BRS-VIS	p.58
U-BRS-WOOD 24 mm	p.60-6
U-E10	p.32
U-E20	p.32
U-EDGE	p.48-49
U-E10-EDGE	p.49
U-E10-WALL	p.4
U-E20-EDGE	p.49
U-E20-WALL	p.47
U-FIX-PLATE-5	p.57
U-KIT-SL-80	p.35
U-LD-3050	p.71
U-LD-5065	n 77

I-PAD	8-39
J-PAD GROUND 3 mm	8-29
P-PAD GROUND 6 mm	8-29
P-PAD GROUND 10 mm	8-29
J-PH5	p.34
J-TABS 5 mm	p.37
J-TABS 2 mm	p.48
I-TABS 3 mm	p.48
J-TABS 4.5 mm	p.48
I-TABS FLAT 2 mm	8-29
J-TABS FLAT 3 mm	8-29
J-TABS FLAT 4.5 mm	8-29
J-TABS SPIKE 2 mm	0-41
J-TABS SPIKE 3 mm	0-41
J-TABS SPIKE 4.5 mm	0-41
J-END-LOCK	p.43
J-END-BASE	p.43
J-TILES	3-46
J-WALL	p.47
I-WASHER 35 mm	p.51
I-WASHER 50 mm	p.51
I-WASHER VIS	p.51



<mark>Ind</mark>ex

D

DPH-KIT-5	p.,	2

P

PB-00	p.2
PB-0-S18	p.22, 26-2
PB-01	p.2
PB-1	p.2
PB-2	p.2
PB-3	p.2
PB-4	p.2
PB-5	p.2
PB-6	p.2
PB-7	p.2
PB-8	p.2
PB-9	p.2
PB-10	p.2
PB-11	p.2
PB-C1	p.2
PB-C2	p.2
PB-END	p.4
PB-END INOX	p.4.
PB-FASTENER	p.5
PB-KEY	p.7

PB-KIT-1	p.51
PB-KIT-2	p.57
PB-KIT-5	p.36
PB- KIT-8	p.48, 57
PB- KIT-8-0-S	p.57
PB-3-TOP	p.24
PB-4-BASE	p.24
PB-4-TOP	p.24
PB-TABS 2 mm	p.33
PB-TABS 3 mm	p.33
PB-TABS 4.5 mm	p.33
PB-TABS 6 mm	p.33
PB-TABS 8 mm	p.33
PB-TABS 10 mm	p.33
PB-0-S-TABS 2 mm	p.26
PB-0-S-TABS 3 mm	p.26
PB-0-S-TABS 4.5 mm	p.26
PIN TUBE	p.57
RACK PLUG SMALL	p.57

U

U-BRS 24 mm	p.56
U-BRS 38 mm	p.56
U-BRS CONNECTOR	p.58
U-BRS-END	p.58
U-BRS-END-CONNECTOR	p.58
U-BRS-EPDM	p.58
U-BRS-STOP	p.58
U-BRS TABS 2 mm	p.58
U-BRS TABS 3 mm	p.58
U-BRS TABS 4.5 mm	p.58
U-BRS-VIS	p.58
U-BRS-WOOD 24 mm	p.60-6
U-E10	p.32
U-E20	p.32
U-EDGE	p.48-49
U-E10-EDGE	p.49
U-E10-WALL	p.4
U-E20-EDGE	p.49
U-E20-WALL	p.47
U-FIX-PLATE-5	p.57
U-KIT-SL-80	p.35
U-LD-3050	p.71
U-LD-5065	n 77

I-PAD	8-39
J-PAD GROUND 3 mm	8-29
P-PAD GROUND 6 mm	8-29
P-PAD GROUND 10 mm	8-29
J-PH5	p.34
J-TABS 5 mm	p.37
J-TABS 2 mm	p.48
I-TABS 3 mm	p.48
J-TABS 4.5 mm	p.48
I-TABS FLAT 2 mm	8-29
J-TABS FLAT 3 mm	8-29
J-TABS FLAT 4.5 mm	8-29
J-TABS SPIKE 2 mm	0-41
J-TABS SPIKE 3 mm	0-41
J-TABS SPIKE 4.5 mm	0-41
J-END-LOCK	p.43
J-END-BASE	p.43
J-TILES	3-46
J-WALL	p.47
I-WASHER 35 mm	p.51
I-WASHER 50 mm	p.51
I-WASHER VIS	p.51



Buzon USA West Projects



References

- · Sun's Practice Facility Phoenix, AZ
- Sony Studio HQ Los Angeles, CA
- Apple Campus Palo Alto, CA
- Samsung HQ Palo Alto, CA
- Lucille Packard Children's Hospital Stanford, CA
- · Haas School of Business UC Berkeley, CA
- IMAX Theater Nassau, NY
- Four Seasons Hotel Honolulu, HI
- · Canal Street Rooftop Pool New Orleans, LA

- · Smith Center Harvard University Cambridge, MA
- · Microsoft Campus Redmond, WA
- · The Dean Palo Alto, CA
- · Nike Campus HQ Beaverton, OR
- · Hoakalei CC Ewa Beach, HI
- · Hilton Grand Islander Honolulu, HI
- Four Seasons Resort at Ko Olina Kapolei, HI
- · One World Trade Center New York City, NY
- Wynn Resort & Casino Hotel Las Vegas, NV







(503) 954 - 3336

