



## Technical Data Sheet-BC

**BC-3** Adjustable from 55 to 85 mm

### COMPONENTS

BC-3 is composed of 2 pieces:  
BC-Top and BC-Base

### CHARACTERISTICS

Top:  $\varnothing$  145 mm, 165 cm<sup>2</sup>

Base:  $\varnothing$  200 mm, 314 cm<sup>2</sup>

Weight: 0,353 kg

Height adjustable from 55 to 85 mm

With addition of BC-PH5 slope corrector, the BC-3 is adjustable in height from 67 to 97 mm and slope from 0 to 5%.

### MATERIAL

Copolymer polypropylene (CPP)

Composition: +/- 80% first grade pre-selected recycled PPC, and +/- 20% Talc + Masterbatch black

Designed and manufactured in Europe

Use of recycled materials exclusively of EU origin

Resistant to weathering, sea salts, algae and a wide range of chemicals

Temperature range: -30°C to + 80°C

### PACKAGING

Pieces per carton: 42 pcs




Carton weight: 15,72 Kg

Carton dimension: 600 x 400 x 410 mm

Cartons per pallet: 25 pcs

Pieces per pallet: 1 050 pcs

Pallet dimensions: 100 x 120 x 220 cm

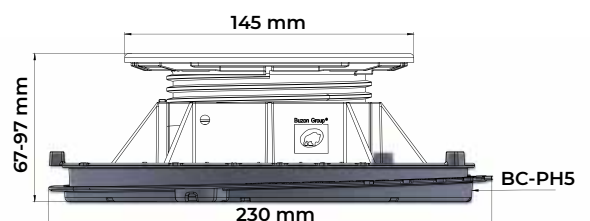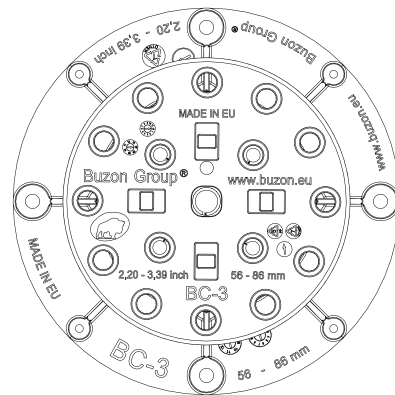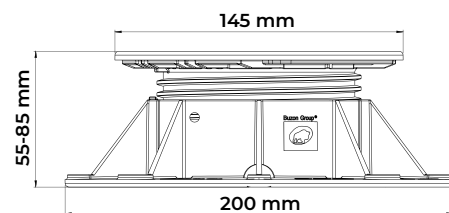

## APPLICATIONS

Buzon pedestals can be used for a wide range of outdoor applications, such as terraces, pool decks and water features, in landscape areas and on rooftops...  
Finishing materials can be freely specified by the designer.

Accessories are available for applications with various outdoor finishes, such as granite stone pavers, composite/ timber decking, ceramic tiles and fibreglass or metal grating panels. Buzon pedestals can be installed on a wide range of solid and stable substrates, such as concrete slabs, cement screeds, waterproof membranes, insulation panels.

### Rectangular Tabs



Height: 17 mm  
Thickness: 2, 3, 4.5, 6 and 8mm



Height: 25 mm  
Thickness: 2, 4.5, 6, 8 and 10mm

### Circular Tabs



Height: 17 mm  
Thickness: 2, 3, 4.5, 6 and 8mm



Height: 25 mm  
Thickness: 2, 4.5, 6, 8 and 10mm

### Batten Holder



### Shims



U-E10 (T- 1mm)  
U-E20 (T- 2mm)

## COMPRESSION TEST\*

Performed on the full (1/1), half (1/2) and quarter (1/4) surface of the head (1kN= 100 kg= 224,8 lbF)

Position	Height (mm)	Breaking load (kN)	Breaking load (lbF)
1/1	85	12,90 (1 290 kg)	2 900
1/2	85	8,70 (870 kg)	1 955
1/4	85	4,60 (460 kg)	1 034

\* Tests carried out by SIRRIS


## SAFETY INSTRUCTIONS

Buzon pedestals are designed to support external raised floors for pedestrian traffic only and are not designed to support or be subjected to moving and/or vibrating machinery & equipment, including maintenance, cleaning vehicles, automobiles and other similar equipment.



Buzon has a policy of continuous improvement and reserves the right to modify, revise or change the above specifications without notice. This brochure is for descriptive purpose only and is based on the product as on the date of publication of this information.


# Buzon USA West Projects

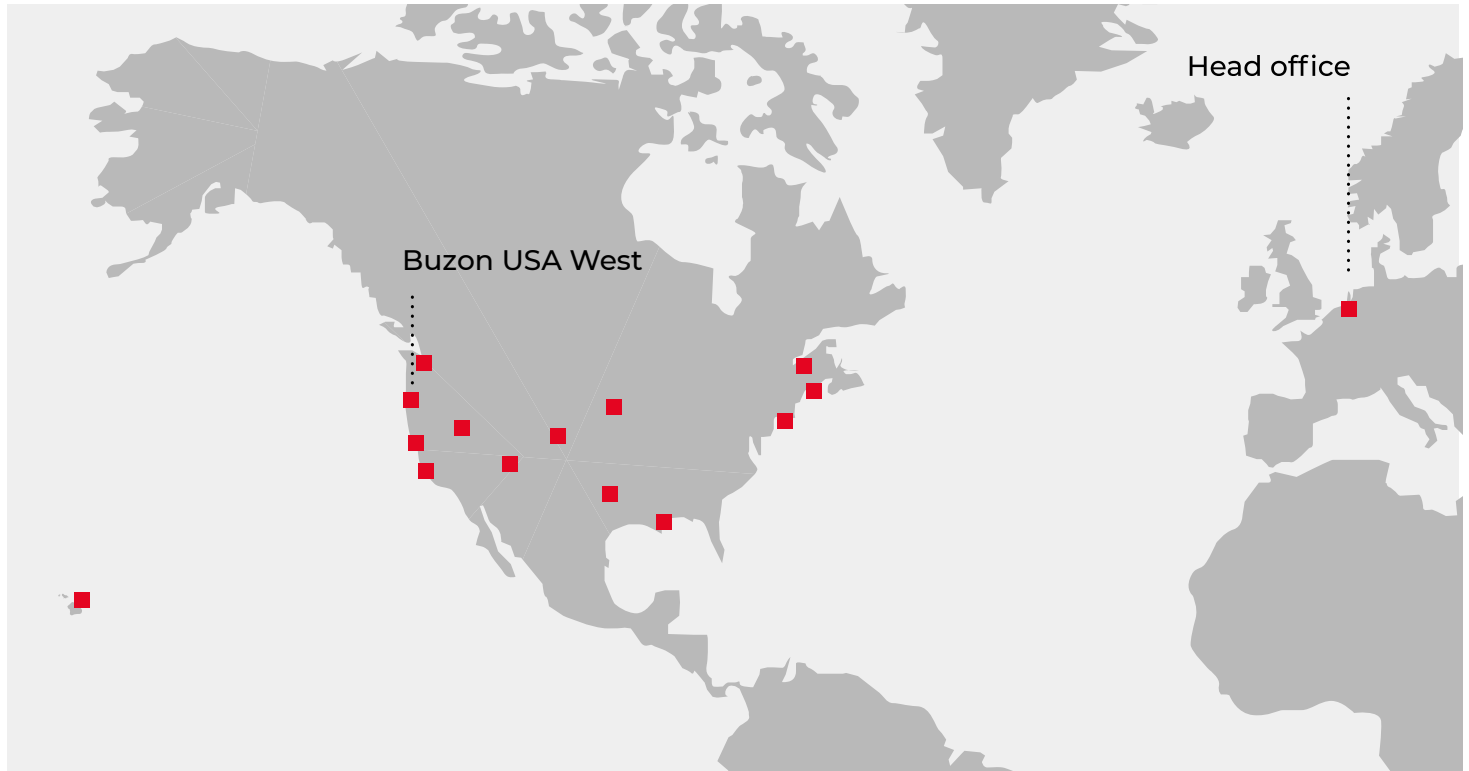

## References

- Sun's Practice Facility - Phoenix, AZ
- Sony Studio HQ - Los Angeles, CA
- Apple Campus - Palo Alto, CA
- Samsung HQ - Palo Alto, CA
- Lucille Packard Children's Hospital - Stanford, CA
- Haas School of Business - UC Berkeley, CA
- IMAX Theater - Nassau, NY
- Four Seasons Hotel - Honolulu, HI
- Canal Street Rooftop Pool - New Orleans, LA

- Smith Center Harvard University - Cambridge, MA
- Microsoft Campus - Redmond, WA
- The Dean - Palo Alto, CA
- Nike Campus HQ - Beaverton, OR
- Hoakalei CC - Ewa Beach, HI
- Hilton Grand Islander - Honolulu, HI
- Four Seasons Resort at Ko Olina - Kapolei, HI
- One World Trade Center - New York City, NY
- Wynn Resort & Casino Hotel - Las Vegas, NV



**Buzon®**

Buzon USA West

[sales@buzonusawest.com](mailto:sales@buzonusawest.com)

[buzonpedestals.com](http://buzonpedestals.com)

(503) 954 - 3336

