





# **Technical Data Sheet-PB**

PB-8 Adjustable from 480 to 595 mm

# **COMPONENTS**

The PB-8 is composed of 4 pieces (1 PB-4 top + 1 coupler PB-C1 and 1 coupler PB-C2 + 1 PB-4 base)

### **CHARACTERISTICS**

Top: ø 170 mm, 227 cm² Base: ø197 mm, 305 cm²

Weight: 1,45 kg

Height adjustable from 480 to 595 mm

With addition of U-PH5 slope corrector, adjustable in height from 494 to 609 mm and slope from 0 to 5%

# **MATERIAL**

Copolymer polypropylene (CPP)

Composition: +/-80% first grade pre-selected recycled

PPC, and **+/-20**% Talc + Masterbatch black

Designed and manufactured in Europe

Use of recycled materials exclusively of EU origin

Resistant to weathering, sea salts, algae and a wide

range of chemicals

Temperature range: -30 C° to +80 C°

# **PACKAGING**

#### Packaging PB-4-Base

Pieces per carton: 24 pcs Carton weight: 9,82 kg

Carton dimension: 610 x 410 x 455 mm

Cartons per pallet: 25 pcs Pieces per pallet: 600 pcs

Pallet dimensions: 100 x 120 x 220 cm


### Packaging PB-C2

Pieces per carton: 24 pcs Carton weight: 13,3 kg

Carton dimension: 600 x 420 x 610 mm

Cartons per pallet: 15 pcs Pieces per pallet: 360 pcs

Pallet dimensions: 100 x 120 x 220 cm

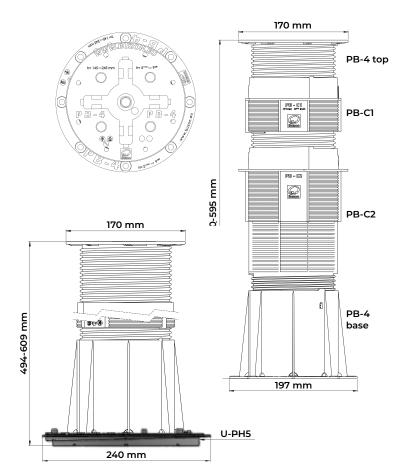

#### Packaging PB-C1

Pieces per carton: 24 pcs Carton weight: 7,82 kg

Carton dimension: 600 x 400 x 430 mm

Cartons per pallet: 25 pcs Pieces per pallet: 600 pcs

Pallet dimensions: 100 x 120 x 220 cm

#### Packaging PB-4-Top

Pieces per carton: 24 pcs Carton weight: 9,05 kg

Carton dimension: 610 x 410 x 455 mm

Cartons per pallet: 25 pcs Pieces per pallet: 600 pcs

Pallet dimensions: 100 x 120 x 220 cm

### **APPLICATIONS**

Buzon pedestals can be used for a wide range of outdoor applications, such as terraces, pool decks and water features, in landscape areas and on rooftops...
Finishing materials can be freely specified by the designer. Accessories are available for applications with various outdoor finishes, such as granite stone pavers, composite / timber decking, ceramic tiles and fibreglass or metal grating panels. Buzon pedestals can be installed on a wide range of solid and stable substrates, such as concrete slabs, cement screeds, waterproof membranes, insulation panels.



#### **COMPRESSION TEST\***

Performed on the full (1/1), half (1/2) and quarter (1/4) surface of the head (1kN=1kg/F=224,8 lbF)

Position	Height (mm)	Yield strength** (kN)	Yield strength (lbF)	Breaking load (kN)	Breaking load (lbF)
1/1	595	5,6 (560kg)	1259	11,1 (1110kg)	2495
1/2	595	<b>4,9</b> (490kg)	1101	9,7 (970kg)	2180
1/4	595	<b>4,2</b> (420kg)	944	8,4 (840kg)	1888

<sup>\*</sup> Tests carried out by SIRRIS

# **SAFETY INSTRUCTIONS**

Buzon pedestals are designed to support external raised floors for pedestrian traffic only and are not designed to support or be subjected to moving and/or vibrating machinery & equipment, including maintenance, cleaning vehicles, automobiles and other similar equipment.







<sup>\*\*</sup> The yield point is the stress from which a material stops deforming in an elastic, reversible manner and thus begins to irreversibly deform (ISO472:2013)

# **Buzon USA West Projects**



# References

- · Sun's Practice Facility Phoenix, AZ
- Sony Studio HQ Los Angeles, CA
- Apple Campus Palo Alto, CA
- Samsung HQ Palo Alto, CA
- Lucille Packard Children's Hospital Stanford, CA
- · Haas School of Business UC Berkeley, CA
- IMAX Theater Nassau, NY
- Four Seasons Hotel Honolulu, HI
- · Canal Street Rooftop Pool New Orleans, LA

- · Smith Center Harvard University Cambridge, MA
- · Microsoft Campus Redmond, WA
- · The Dean Palo Alto, CA
- · Nike Campus HQ Beaverton, OR
- · Hoakalei CC Ewa Beach, HI
- · Hilton Grand Islander Honolulu, HI
- Four Seasons Resort at Ko Olina Kapolei, HI
- One World Trade Center New York City, NY • Wynn Resort & Casino Hotel - Las Vegas, NV







(503) 954 - 3336

