

**Buzon®**

Technical Data Sheet


E-BRS-FIX Fixation for E-BRS

COMPONENTS

The **E-BRS-FIX** is composed of 1 piece.

CHARACTERISTICS

Weight: **0.02 lbs (0.009 kg)**

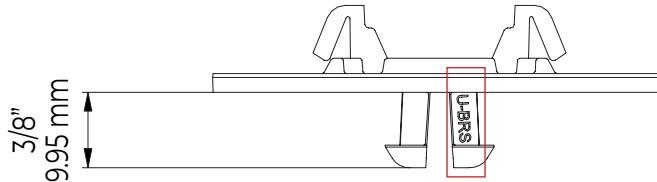

MATERIAL

Copolymer polypropylene (CPP)

Composition: **+/- 80%** first grade pre-selected recycled PPC, and **+/- 20%** Talc + Masterbatch black

Designed and manufactured in Europe.

Use of recycled materials exclusively of EU origin.

Resistant to weathering, sea salts, algae and a wide range of chemicals.

Temperature range: **-22 °F to +176 °F. (-30 °C to +80 °C)**

PACKAGING

Pieces per carton: **120 pcs**


Carton weight: **3.1 lbs (1.40 kg)**

Carton dimension: **16 1/8" x 12 13/16" x 4 5/16" (410 x 325 x 110 mm)**

Cartons per pallet: **270 pcs**

Pieces per pallet: **32 400 pcs**

Pallet dimensions: **39 3/8" x 47 1/4" x 7-2 5/8" (100 x 120 x 220 cm)**

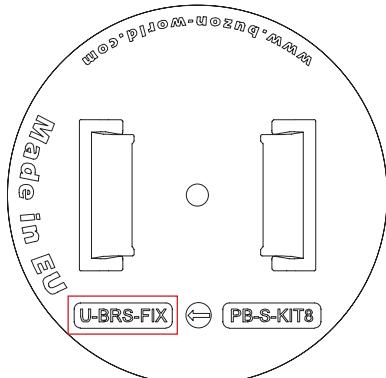

APPLICATIONS

Fixation only available for the E-BRS system (**E-BRS-24-M, E-BRS-24-B, E-BRS-38-M, E-BRS-38-B**), to be placed on the top of the joist.

SAFETY INSTRUCTIONS

Buzon pedestals and accessories are designed to support external raised floors for pedestrian traffic only and are not designed to support or be subjected to moving and/or vibrating machinery & equipment, including maintenance, cleaning vehicles, automobiles and other similar equipment.

Buzon has a policy of continuous improvement and reserves the right to modify, revise or change the above specifications without notice. This technical data sheet is for descriptive purpose only and is based on the product as on the date of publication of this information.